

User Manual

10 Port Charging Station




Human friendly

Thank you for choosing Unitek 10 Port Charging Station. Please read the user manual carefully before use and save them. If you need any help, please contact our professional customer service team support_us@unitek-products.com.

Product Diagram

A: Smart USB Output
B: Charging Station Power Connector
C: Power Adapter Connector
D: Adjustable Divider (11 pieces)
E: Power Indicator
F: Power Switch

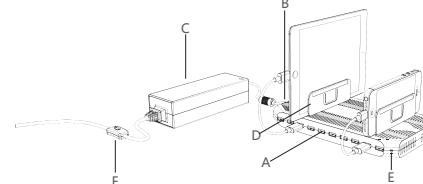

Specification

Series	60W+White	60W+Black	96W+White
Adjustable Divider	11 Short Dividers	11 Tall Dividers	11 Short Dividers
Input Power	AC 100-240V 50/60Hz 1A Max	AC 100-240V 50/60Hz 1A Max	AC 100-240V 50/60Hz 1.5A Max
Output Power	DC 15V/4A Total (Each 2.4A Max)	DC 15V/4A Total (Each 2.4A Max)	DC 12V/8A Total (Each 2.4A Max)

Package Contents

- 1 x Charging Station
- 1 x Power Cord
- 1 x AC Adapter
- 1 x User Manual
- 11 x Adjustable Divider

How to Use

1. Connect the AC power cord to the power adapter and then connect to the charging station.
2. Install the divider on the charging stand according to your actual needs. The distance between the divider can be adjusted according to the width of the device.
3. Before connecting to the power supply, ensure that the connection between the AC power cord, the power adapter, and the charging stand is inserted.
4. Turn on the AC power switch and ensure the LED indicator is turned on.

▶ 1
▶ 2

Note

1. When inserting the bracket, please pay attention to the insertion slot, ensure that no space between the charging station and the bracket.
2. The space between the bracket should be adjusted according to the thickness of the charging device and should not leave too much space.
3. It is recommended that to charge the device with the original USB charging cable. To avoid repeated insertion and removal of the charging cable, you can use the AC power switch to disconnect the power.
4. Keep away from liquids and high-temperature sources when using.
5. Do not drop, knock, or disassemble the product yourself.
6. Do not place charging equipment weighing more than 2 kg on the product.
7. Keep it out of reach of children

FAQ

Q: Why the charging time is varying each time?
A: This is because smartphones and tablets will automatically evaluate the battery power level and output the most efficient power. When the charging device has a higher remaining battery, the charging speed will be slower, then switch to trickle charging.

Q: Does every single USB port output 5V/2.4A of power when all USB ports are connected?

A: Yes, the charging station will distribute maximum power which is demanded by smartphone/tablet.

Q: Why is the charging station stop working suddenly?
A: When the total power output exceeds the limit, the charging station will stop charging automatically to protect the devices to avoid damage caused by over-voltage. Just remove some of the devices and turn on the charging station, then you can continue to use it.

Warranty

The Unitek 10-Port USB Charging Station is covered by Unitek warranty for 24 months. If the product fails due to manufacturer defects, please contact us by email at support_us@unitek-products.com

▶ 3
▶ 4