



GAMAKAY

MODEL: TK68-HE

Key combination function

	WIN	MAC
Fn+ESC	‘	‘
Fn+Shift+ESC	~	~
Fn+F1	F1	F1
Fn+F2	F2	F2
Fn+F3	F3	F3
Fn+F4	F4	F4
Fn+F5	F5	F5
Fn+F6	F6	F6
Fn+F7	F7	F7
Fn+F8	F8	F8
Fn+F9	F9	F9
Fn+F10	F10	F10
Fn+-	F11	F11
Fn+=	F12	F12
Fn+A	Pause playback	Pause playback
Fn+S	Previous song	Previous song
Fn+D	Next song	Next song
Fn+F	mute	mute
Fn+G	Volume up	Volume up
Fn+H	Volume down	Volume down
Fn+U	PRTSCR	PRTSCR
Fn+I	Scrlk	Scrlk

Fn+J	INS	INS
Fn+K	HOME	HOME
Fn+L	Pause	Pause
Fn+L_Win	LOCK WIN	\
Fn+Space bar	Battery power query (battery power supply is valid in wireless mode)	
Fn+Z	Layer 1	Layer 1
Fn+X	Layer 2	Layer 2
Fn+C	Layer 3	Layer 3

Keyboard lighting setting

FN+\	Light mode switch	Light mode switch
Fn+Backspace	Monochrome light switch	Monochrome light switch
Fn+Enter	Turn on/off the backlight	Turn on/off the backlight
Fn+↑	Backlight brightness ↑	Backlight brightness ↑
Fn+↓	Backlight brightness ↓	Backlight brightness ↓
Fn+←	Backlight speed -	Backlight speed -
Fn+→	Backlight speed +	Backlight speed +

Customized key travel

FN+DEL	Customize	Customize
FN+PGUP	Comfort	Comfort
FN+PGDN	Sensitive	Sensitive
FN+END	Game	Game
FN+C		

Comfort mode: Triggered by pressing the button around 1.5mm; FN+PGUP switches this mode

Sensitive mode: button trigger at 0.5mm; FN+PGDN switches this mode


Game mode: Press the button to trigger at 0.5mm, release the trigger stroke at 2mm and turn on continuous rapid triggering (RT); FN+END switches this mode

Custom DIY mode: You can set the trigger stroke of each button in the driver and choose whether to turn on the continuous rapid trigger (RT) function. FN+DEL switches this mode

Key Setting DKS StrokeSetting Other Setting

Current Mode Comfort Sensitive GAME Customize

Set the key trigger key range: No Key SelectedAll buttons Non-stop rapid trigger

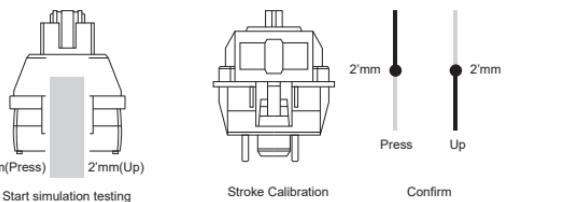

Connection Mode Combination key and connection method

Fn+Q	Bluetooth 1	Bluetooth 1
Fn+W	Bluetooth 2	Bluetooth 2
Fn+E	Bluetooth 3	Bluetooth 3
Fn+R	2.4G mode	2.4G mode
Fn+T	Wired mode	Wired mode

Bluetooth Mode: Turn on the power switch, press and hold the Fn+Q/W/E key combination for 3S to make the keyboard enter pairing mode; the Q/W/E indicator flashes quickly, and the Q/W/E indicator stays on for 3S after connecting to the device; if no connected device, lights off, keyboard goes to sleep.

2.4G Mode: Turn on the power switch, press and hold the Fn+R key combination for 3S to make the keyboard enter 2.4G mode, the indicator light flashes quickly, insert the 2.4G dongle, exit the pairing after successful pairing, and exit the pairing mode after 30s if the paired device is not found, the indicator light is off, the keyboard goes to sleep.

Wired Mode: Turn off the power switch, press and hold the Fn+T key combination for 3S to make the keyboard enter wired mode.

Warning: If you plug in the cable while in wired mode and try to switch to wireless mode by pressing FN+QWE/R, the system will detect that the keyboard battery is only at 1%.