

尺寸：105x148mm

材质：100g书纸

工艺：双面四色印刷 折页

TRUEQUE



User Manual

Wireless Keyboard Mouse


After-Sales
Email: truequeservice@outlook.com
Website URL: trueque.com

KM22 Ultra

You will receive

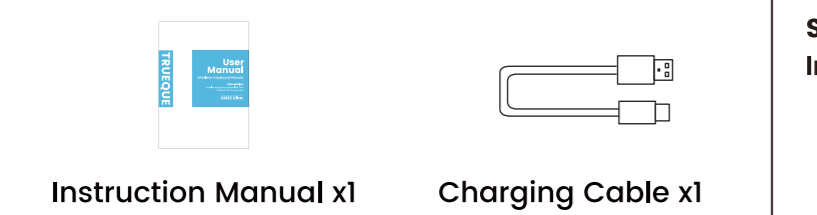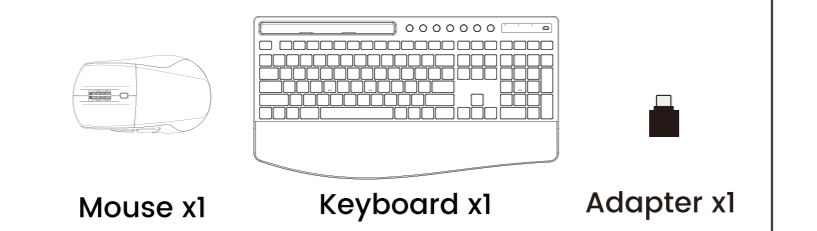


Quick Start

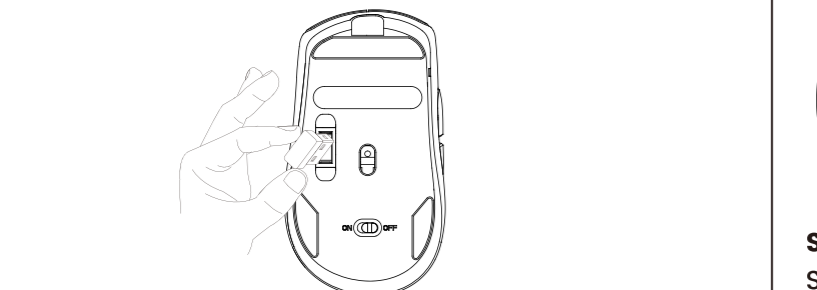


Step 1: Find the USB Receiver
The USB receiver is stored at the back of the mouse.
Please remove it before use.

Step 2: Plug In

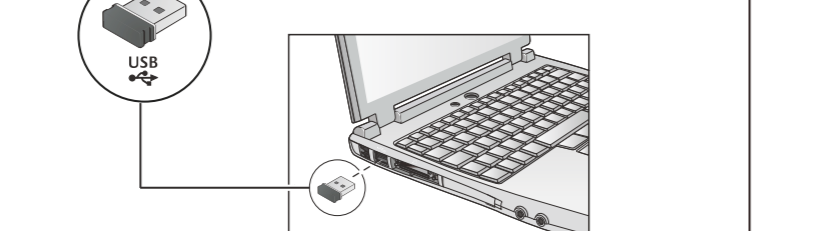


Insert the USB receiver into your computer's USB port.

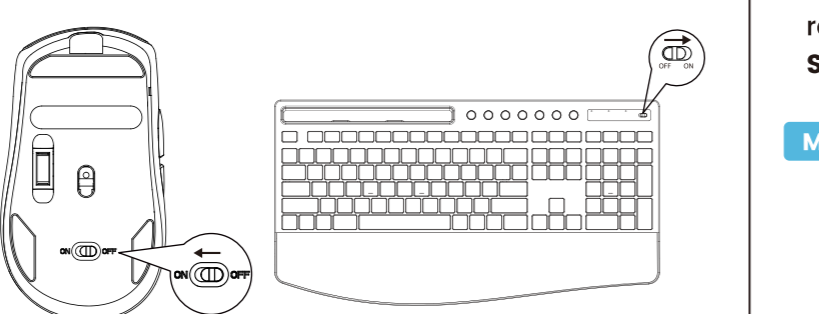


Step 3: Power On
Switch on the keyboard and mouse. They will connect automatically, no driver needed.

Keyboard re pairing method

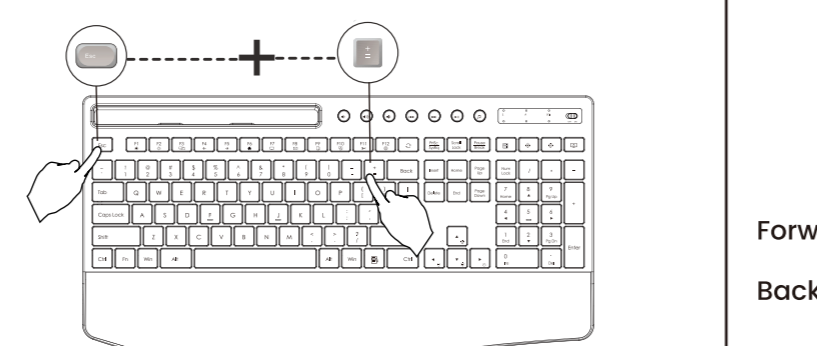



Step 1: Hold ESC + "=" for 3 seconds until the red light turns solid.
Step 2: Plug in the USB receiver.

Mouse re pairing method

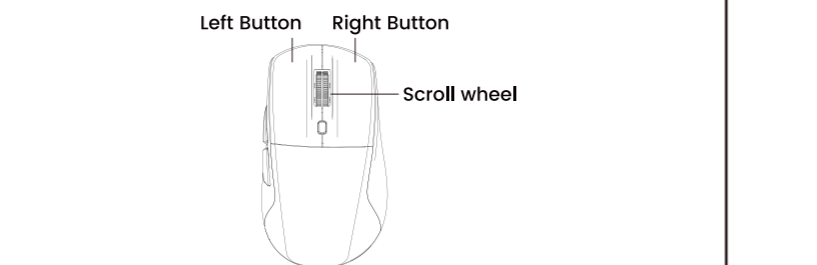


Step 1: Hold the left, right, and scroll wheel buttons together for 3-5 seconds.
Step 2: Plug in the USB receiver.

Mouse Functions

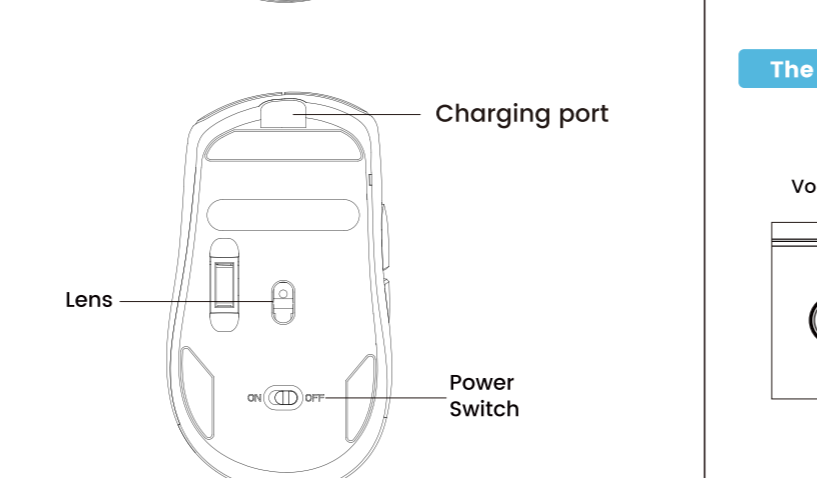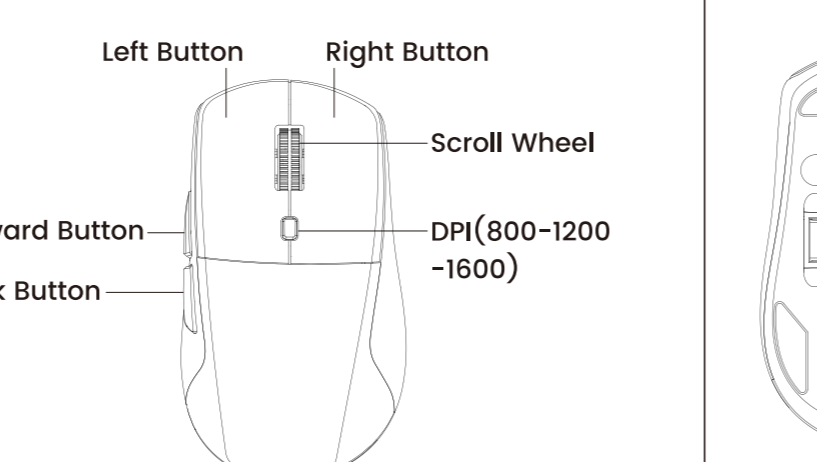


Mouse indicator light

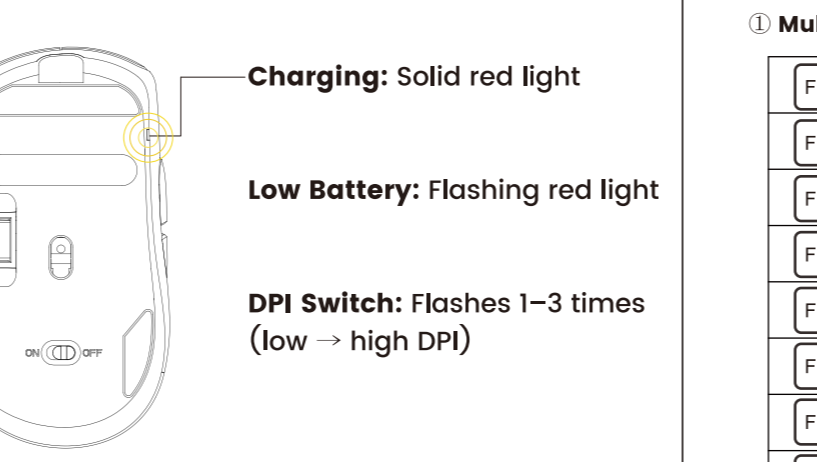

Charging: Solid red light
Low Battery: Flashing red light
DPI Switch: Flashes 1-3 times (low → high DPI)

The functions of the shortcut keys

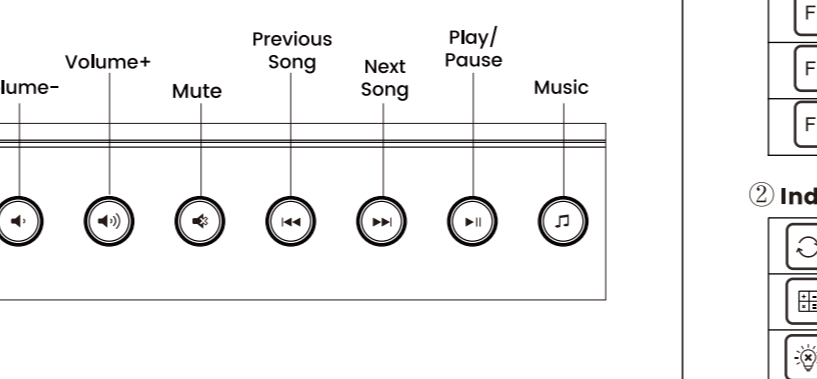

Keyboard Functions

① Multimedia Shortcuts(FN + Function Keys)

FN + [Sun]	Dim Screen Brightness
FN + [Moon]	Brighten Screen Brightness
FN + [Window]	Quick Window Switch
FN + [Left Arrow]	Back Key
FN + [Right Arrow]	Forward Key
FN + [Home]	Home
FN + [Computer]	My Computer
FN + [Envelope]	Email
FN + [Copy]	Copy
FN + [Paste]	Paste
FN + [Cut]	Cut
FN + [Globe]	Language Switch


② Independent Shortcut Keys

[Refresh]	Page Refresh	[Mouse]	Right Mouse Button Function
[Calculator]	Calculator	[Lock]	Lock Screen
[Light]	Turn on/off Backlight		

③ Backlight Control

FN + [Sun] / [Moon] : Adjust Brightness (5 levels)
FN + [Light] : Switch Lighting Effects (9 modes)
FN + [Color] / [Color] : Cycle Through Colors Lighting Speed (Decrease / Increase)

Indicator light function

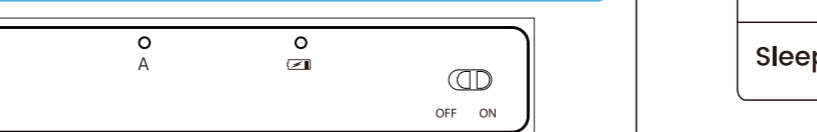

1 **Num Lock:**
Green light on when Num Lock is active.

A **Caps Lock:**
Green light on when Caps Lock is active.

Low Battery:
1.Red light flashes when power is low.
2.Pairing: Steady red light during re-pairing.
3.Charging: Steady red light when charging via Type-C.

Product Specifications

Keyboard:

Dimensions:	16.9 × 8.8 × 0.9 in
Weight:	780 ± 20 g
Voltage:	3.7 V
Battery Capacity (Rechargeable):	4000 mAh
Charging Time:	10-14 hours
Battery Life:	30 days typical use (Backlight status)
Sleep Mode:	Auto sleep after 2 minutes idle

Mouse:

Dimensions:	4.6 × 2.6 × 1.5 in
Weight:	94 ± 5 g
Battery Capacity (Rechargeable):	800 mAh
Charging Time:	2-3 hours
Battery Life:	20 days typical use (Backlight status)
Sleep Mode:	Auto sleep after 2 minutes idle

FAQ

Q1: Can't connect?
A: Make sure the USB receiver is firmly plugged in, both keyboard and mouse are switched ON, and stay within 26 ft (8 m).
If it still doesn't work, please re-pair the devices (see **Keyboard Pairing / Mouse Pairing section**).

Q2: Backlight off?
A: This may happen if:
Device enters sleep mode after a few minutes idle → press any key/click to wake.
Battery is low → recharge via USB-C cable.
Backlight was turned off → use ② Backlight Control to adjust brightness/effects.

Q3: Keyboard not responding?
A: Check if the keyboard is charged. Re-plug the USB receiver or try another USB port (avoid hubs). If still unresponsive, re-pair as in Q1.


Q4: Mouse cursor not smooth?
A: Use on a flat, non-reflective surface (avoid glass or glossy tables). Adjust DPI (3 levels up to 1600 DPI) to match your screen. Recharge if battery is low.

Customer service

Buy on TRUEQUE, You will get:
30-Day Money-Back Guarantee
90-Day Free Replacement
Hassle-Free Warranty Without Returning
Lifetime Customer Support

Contact us

For FAQs and more information, please visit:
Phone: 1-866-608-6766 (US), Mon-Fri,
9am-6pm (Worktime), 1pm-2pm (Rest)

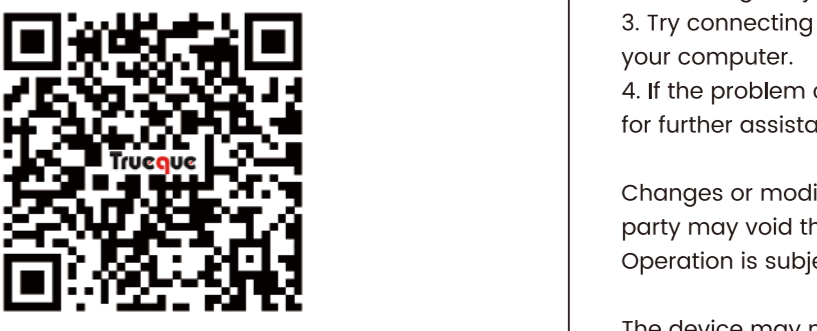

Truequeservice@outlook.com

FCC Statement

This equipment has been tested and complies with the limits for Class B digital devices under Part 15 of the FCC rules. These rules are designed to provide reasonable protection against harmful interference in a residential environment.

The device emits radio frequency energy during use, and improper setup may cause interference with wireless communications. If interference is detected (you can test by turning the device off and on), please try the following:

1. Make sure the USB receiver is firmly plugged into your computer.
2. Place the keyboard, mouse, and USB receiver closer together, with no large objects blocking the signal.
3. Try connecting the USB receiver to a different USB port on your computer.
4. If the problem continues, consult a technician or your dealer for further assistance.

Changes or modifications not approved by the responsible party may void the user's authority to operate this equipment. Operation is subject to the following two conditions:

The device may not cause harmful interference.
The device must accept any interference received, including interference that may cause undesired operation.