



## USER MANUAL

# LG TONE Style

**Bluetooth®** Wireless Stereo Headset

---

Please read the Important Safety Information for the proper use of this product. After reading, store this User Manual in an easily accessible place for all users.

Rev 1.0 US

**NOTE:** Please read all information carefully prior to using the headset in order to enjoy the best performance and prevent damage to the product.

## HBS-SL6S / HBS-SL5

[www.lg.com](http://www.lg.com)

Copyright © 2019 LG Electronics Inc. All rights reserved.

## Contents

|                                         |    |
|-----------------------------------------|----|
| Safety Cautions .....                   | 1  |
| Precautions When Using the Product..... | 2  |
| HD Speaker.....                         | 2  |
| Product Components.....                 | 3  |
| Product Description.....                | 4  |
| Power On/Off.....                       | 4  |
| Pairing and Connecting.....             | 5  |
| Indicator Lamp.....                     | 6  |
| Mobile Calling Functions.....           | 7  |
| Playing Music .....                     | 8  |
| Speaker Mode (HBS-SL6S only).....       | 8  |
| Battery Charging and Alerts.....        | 9  |
| Vibration Alert Settings .....          | 9  |
| Out of Range.....                       | 9  |
| LG Tone & Talk™ .....                   | 10 |
| Troubleshooting.....                    | 10 |
| Specifications and Features .....       | 11 |
| Declaration of Confirmation .....       | 12 |
| Additional Information .....            | 13 |
| Limited Warranty.....                   | 15 |
| Important Safety Information.....       | 16 |
| Open Source Software Notice .....       | 17 |

The LG TONE Style(HBS-SL6S) / LG TONE Style(HBS-SL5) is a lightweight wireless headset that uses *Bluetooth* technology.

This product can be used as an audio accessory for devices supporting either the A2DP or Hands-Free *Bluetooth* Profile.

## Safety Cautions

### CAUTION

Do not disassemble, adjust, or repair the product arbitrarily.

Do not place the product near excessive heat or flammable material.

Do not arbitrarily replace the battery, as it may explode.

The product may be damaged if an incompatible charger is used.

Make sure that an infant or child does not swallow a magnet or a small component of the product.

Make sure that foreign objects do not enter the charger's connectors (charging port and power plug). Failure to do so may result in fire or electric shock.

If you have a medical device implanted, contact your doctor before using this device.

For your safety, do not remove the battery incorporated in the product.

The lithium-ion polymer battery is a hazardous component that can cause injury.

Battery replacement by an unqualified professional can cause damage to your device.

In order to prevent unnecessary energy consumption, disconnect the device when fully charged. Always use an easily accessible power outlet for charging your device.

### WARNING

Do not drop the product from a high place.

Make sure there is no water, alcohol, or benzene in contact with the product.

Do not store the product in a wet or dusty place.

Do not place heavy objects on the product.

This product is not waterproof. Avoid humidity and water.

## Precautions When Using the Product

Refer to the following to use the product for its normal life span.

|                                                                                   |                                                                     |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------|
|  | Do not pull the earphone cable with excessive force.                |
|  | If the product is exposed to excessive sweat, clean the product.    |
|  | Keep the earbuds clean.                                             |
|  | For your safety, do not wear the product while it is being charged. |

## HD Speaker

If the communication network of the device you are connecting to supports HD Voice Calling, you can enjoy making voice calls and listening to music in high definition.

## Product Components



LG TONE Style HBS-SL6S /  
LG TONE Style HBS-SL5  
(medium ear gels installed)



Extra Ear Gels  
(small & large)



USB Type C™ Charging Cable



User Manual



Warranty Card

NOTE: Actual product design may differ from images shown in manual.

### CAUTION

Make sure authentic LG Electronics components are used. Using a non-authentic component may damage the product and thus void the warranty.


Use the USB Type C™ cable provided with the product.

### NOTE

The complete manual is available for download from the LG Electronics website.

 [www.lg.com](http://www.lg.com) > Support > Manuals & Documents > Browse by Product > Mobile Devices > LG Bluetooth Devices

## Product Description

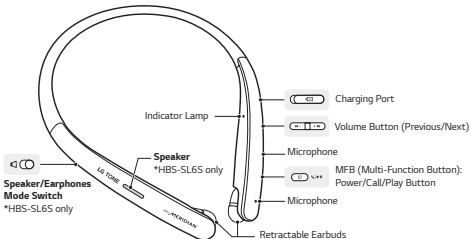

\* The Speaker function is only supported in HBS-SL6S model. In the HBS-SL5 model that does not support the Speaker function, there is no Speaker and Speaker/Earphone Mode Switch.

The appearance and specifications of the actual product may differ depending on the model.

NOTE: To prevent hearing loss, a control sound is played twice or at length when controlling the volume at high volumes.

## Power On/Off

| Functions | Description                                     |
|-----------|-------------------------------------------------|
| Power On  | Press and hold the <b>MFB</b> for two seconds.  |
| Power Off | Press and hold the <b>MFB</b> for four seconds. |

\* The blue LED blinks and an alert sounds when you turn the product on or off.

## Pairing and Connecting

Put in your earbuds to easily pair and connect by following the voice prompts.



NOTE: If you are prompted for the authorization code (PIN code), type **0000**.

If you hear that the battery is insufficient, recharge the battery before proceeding with pairing.

If pairing is not completed within three minutes, the power automatically turns off. If this happens, press and hold the **MFB** for two seconds to turn on the power.



### Connecting Quickly



- 1 From the mobile phone's **Settings** menu, turn on *Bluetooth*.
  - 2 On the headset, press and hold the **MFB** for two seconds to turn on the power.
  - 3 The blue **Indicator Lamp** turns on, and the headset enters Search mode.
  - 4 From the mobile phone or device, select [LG HBS-XXXX] to connect.
- NOTE: In the above, HBS-XXX is a model number unique to the product and may differ depending on the model (For example, in the case of a HBS-SL6S model, LG HBS-SL6S is displayed).
- 5 A voice message will indicate that the connection is completed.


### Fast Pair

- 1 From the mobile phone's **Settings** menu, turn on *Bluetooth*.
- 2 On the headset, press and hold the **MFB** for two seconds to turn on the power.
- 3 The blue **Indicator Lamp** turns on, and the headset enters Search mode.
- 4 Place the mobile phone whose screen is unlocked or a device to be connected nearby and connect it to the headset according to the instructions on the screen.
- 5 A voice message will indicate that the connection is completed.

NOTE: It only supports Android™ 6.0 or above.

Before connecting the headset, configure the mobile device or the device to be connected to use the location information.

## Connecting Manually (pairing with another phone or re-pairing)



- 1 While the headset is turned off, press the **MFB** and the **Volume Button (Previous ◀ —)** simultaneously for two seconds or more.
- 2 The blue **Indicator Lamp** turns on and the headset switches to Search mode.
- 3 From the mobile phone or device, select [LG HBS-XXX] to connect.

NOTE: In the above, HBS-XXX is a model number unique to the product and may differ depending on the model (For example, in the case of a HBS-SL6S model, LG HBS-SL6S is displayed).

## Multiple Connections

The headset can be connected to two devices, such as a mobile phone and a PC, simultaneously.

NOTE: If the headset is simultaneously connected to two devices, the main functions work based on the "Main Connected Device."

- 1 To connect multiple devices, turn off the headset while the product is connected to one device.
- 2 Perform 1 to 3 under "Connecting Manually." This device becomes the "Main Connected Device."
- 3 Try to connect to headset using a previously connected device. This device becomes the "Sub Connected Device."

## Automatic Reconnection


If you turn on the headset, it will automatically connect to the most recent device (Main or Sub Connected Device) it was connected to. (If a device cannot be found, Search mode will be activated.)

If the product does not automatically connect to the device you want, search for your product on the device you want to connect to and connect it manually.

## Indicator Lamp

| Status                                              | Description                                                   |
|-----------------------------------------------------|---------------------------------------------------------------|
| Power On/Power Off                                  | The blue <b>Indicator Lamp</b> flashes.                       |
| Search Mode                                         | The blue <b>Indicator Lamp</b> is on.                         |
| Headset/Hands-Free Profile Connected/Call Connected | The <b>Indicator Lamp</b> will flash blue every five seconds. |


## Mobile Calling Functions



| Functions                           | Status            | Description                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Answering Call                      | Ringing           | Briefly press the <b>MFB</b> .<br>NOTE: The headset will not vibrate if the Vibration function has been turned off.                                                                                                                                                                                                                                                      |
| Making a Call                       | Idle              | If you make a call using a mobile phone, the call is automatically connected to the headset.                                                                                                                                                                                                                                                                             |
| Switching Calls                     | Talking           | Press and hold the <b>Volume Button (Next + ►)</b> for one second to switch the call between the headset and the mobile phone.                                                                                                                                                                                                                                           |
| Voice Dial                          | Idle/<br>Music on | Briefly press the <b>MFB</b> twice to activate your headset's voice.                                                                                                                                                                                                                                                                                                     |
| Receiving a Call while on the Phone | Talking           | You can receive another call while on the phone by briefly pressing the <b>MFB</b> . The existing call switches to a call waiting status. Briefly press the <b>MFB</b> to switch back to the previous call.<br>If the previous call is in standby, you can finish the current call in the mobile phone. (Performance may differ depending on the mobile phone settings.) |
| Rejecting a Call                    | Ringing           | Briefly press the <b>MFB</b> twice.                                                                                                                                                                                                                                                                                                                                      |
| Enabling/<br>Disabling Mute         | Talking           | Press and hold the <b>Volume Button (Previous ◀ -)</b> for one second.                                                                                                                                                                                                                                                                                                   |
| Volume up/<br>Volume down           | Talking           | Briefly press the <b>Volume Button (Next + ►)</b> or <b>Volume Button (Previous ◀ -)</b> .                                                                                                                                                                                                                                                                               |

NOTE: The Voice Dial function works on the Main Connected Device or on the device on which you made the last call. (The Voice Dial function may work differently depending on the mobile phone being used.)

## Playing Music




| Functions                   | Status   | Description                                                                                                                                                                                     |
|-----------------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Play                        | Idle     | Briefly press the <b>MFB</b> .                                                                                                                                                                  |
| Pause                       | Music on | Briefly press the <b>MFB</b> .                                                                                                                                                                  |
| Play Previous/<br>Next Song | Music on | Press and hold the <b>Volume Button (Next + ►)</b> for one second to play next song.<br>Press and hold the <b>Volume Button (Previous ◀ -)</b> for one second to play previous song.            |
| Volume up/<br>Volume down   | Music on | Briefly press the <b>Volume Button (Next + ►)</b> or <b>Volume Button (Previous ◀ -)</b> .                                                                                                      |
| Equalizer Mode<br>Change    | Music on | Press and hold <b>Volume Button (Next + ►)</b> and <b>Volume Button (Previous ◀ -)</b> simultaneously for one second to move to the next step.<br>Bass Boost (Default) > Normal > Treble Boost. |

### Switching Music Players

To switch to a different music playback device when multiple devices are connected, stop the currently playing music and then play music from the device of your choice.


### Speaker Mode (HBS-SL6S only)

If you slide the **Speaker/Earphones Mode Switch** to the Speaker mode position, the device will enter Speaker mode.



## Battery Charging and Alerts

Open the **Charging Port** cover and connect the charger to the **Charging Port**.




| Indicator Lamp | Red      | Purple | Blue      |
|----------------|----------|--------|-----------|
| Battery Status | Charging | 80%    | Completed |

The headset is turned off while being charged.

NOTE: If the temperature is too high or too low, the status indicator lamp blinks in red and the battery is not charged.


For more information on the battery, go to [Additional Information] > [5. Battery information].

Press and hold the **Volume Button (Previous ◀ -)** for one second in idle mode to check the Indicator Lamp and battery level by voice.



| Battery Status | Sufficient   | Normal         | Insufficient |
|----------------|--------------|----------------|--------------|
| Indicator Lamp | Blue flashes | Purple flashes | Red flashes  |

## Vibration Alert Settings



The headset is set to Vibration Alert by default. To enable or disable Vibration Alert, press and hold **Volume Button (Next + ▶)** for two seconds in idle mode.

NOTE: If you turn off the vibration alerts, it will not vibrate even when a call is being received or you are out of communication range.

## Out of Range

If the device connected to the product is out of effective communication range, the communication signal becomes weak and the communication is lost. The effective communication range may vary depending on surrounding and other conditions.

If the device comes back within effective communication range, the product automatically reconnects to the device. If the device is not automatically reconnected, press the **MFB** on the product to connect to it manually.

If a device that is not in use goes out of communication range when multiple devices are connected, the product vibrates and a voice message indicates that the connection is lost. In this case, the automatic reconnection function is not supported.

## LG Tone & Talk™

Tone & Talk supports various functions, including text & voice directions and calling. Search for "LG Tone & Talk" in the Google Play store (Android™ OS) or in the App Store® (iOS) to install Tone & Talk. You can scan the QR code on the right to install Tone & Talk.

NOTE: Some features in Tone & Talk may not be activated on iOS devices.



Google Play



App Store

| Function               | Description                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Voice Notification     | If you set Voice Notification to On, it reads the SMS, MMS, and social media messages with voice.                     |
| Vibration Notification | You can set the vibration notification to ON/OFF in Notification Setting.                                             |
| Check Headset Battery  | You can check the headset battery amount through the app screen.                                                      |
| Change Equalizer Mode  | In the EQ menu, you can change the equalizer mode.<br>(The Equalizer Mode cannot be changed in Speaker Mode.)         |
| Software Update        | When there is a software update for the headset, it notifies you of the update and allows you to update the software. |

## Troubleshooting

| Problems                                   | Solutions                                                                                                                                                                                                                                                          |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The power does not turn on                 | Check the battery level and charge it.                                                                                                                                                                                                                             |
| Cannot make a call with the headset        | If the mobile phone does not support headset and Hands-Free functions, you cannot use the calling features.<br>Check the battery level and charge it.                                                                                                              |
| Cannot connect the headset to mobile phone | Check whether the headset is turned on.<br>Check whether the headset is in Search mode.<br>- To switch to the Search mode, press and hold <b>MFB</b> and <b>Volume Button (Previous ◀)</b> simultaneously for two seconds or more while the headset is turned off. |

| Problems         | Solutions                                                       |
|------------------|-----------------------------------------------------------------|
| The sound is low | Control the sound level of the device connected to the headset. |

## Specifications and Features

| Item                                                 | HBS-SL6S                                             | HBS-SL5          |
|------------------------------------------------------|------------------------------------------------------|------------------|
| Bluetooth Specifications                             | V 5.0 (Headset/Hands-Free/A2DP/AVRCP)                |                  |
| Battery                                              | Battery 3.7 V / 75 mAh, Lithium-ion polymer          |                  |
| Standby Time<br>(Standby Time in Speaker Mode)       | Up to 450 hours*<br>(Speaker Mode: Up to 400 hours*) | Up to 450 hours* |
| Talk Time<br>(Talk Time in Speaker Mode)             | Up to 8 hours*<br>(Speaker Mode: Up to 4 hours*)     | Up to 8 hours*   |
| Music Play Time<br>(Music Play Time in Speaker Mode) | Up to 8 hours*<br>(Speaker Mode: Up to 3 hours*)     | Up to 8 hours*   |
| Weight                                               | 1.6 oz                                               | 1.5 oz           |
| Dimensions                                           | 6.2" (W) X 7.0" (L) X 0.7" (H)                       |                  |
| Charging Time                                        | Approximately 1 hour                                 |                  |
| Rated Input Voltage                                  | DC 4.75 V - 5.3 V, 400 mA                            |                  |
| Operating Temperature                                | 0°C (+32°F) - +35°C (+95°F)                          |                  |
| Operating Frequency                                  | 2402 MHz to 2480 MHz                                 |                  |

\* Duration of use may vary depending on the connected mobile device, features being used, settings, signal strength, operating temperature, frequency band, and other methods of use.

## Declaration of Confirmation

### FCC NOTICE TO USERS:

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the manufacturer (or party responsible) for compliance could void the user's authority to operate the equipment.

### FCC Part 15.105 statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### IMPORTANT NOTE:

To comply with the FCC RF exposure compliance requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void the user's authority to operate the device.

*Bluetooth®* is a registered trademark of Bluetooth SIG, Inc. worldwide.

Google, Android, Google Play, the Google Play logo and other related marks and logos are trademarks of Google LLC.

Supplier's Declaration of Conformity

|                   |                                               |
|-------------------|-----------------------------------------------|
| Trade Name        | LG                                            |
| Responsible Party | LG Electronics USA, Inc.                      |
| Address           | 1000 Sylvan Ave Englewood Cliffs,<br>NJ 07632 |
| Telephone         | (201)266-2215                                 |



HBS-SL6S FCC ID : ZNFHBSSL6S  
HBS-SL5 FCC ID : ZNFHBSSL6S

## Additional Information

### 1. Radio frequency exposure

This *Bluetooth* Wireless Stereo Headset is a radio transmitter and receiver. When in operation, it communicates with a *Bluetooth*-equipped mobile device by receiving and transmitting radio frequency (RF) electromagnetic fields (microwaves) in the frequency range 2.4 to 2.4835 GHz. Your *Bluetooth* headset is designed to operate in compliance with the RF exposure guidelines and limits set by national authorities and international health agencies when used with any compatible LG Electronics mobile phone.

### 2. *Bluetooth* connection precautions

The following environments affect the range and reception of *Bluetooth* signals:

- When walls, metal, human bodies, or other obstacles exist between the *Bluetooth* device and the connected device.
- When equipment that uses 2.4 GHz frequency signals (wireless LANs, wireless phones, microwave ovens, etc.) is placed near the devices being used.

### 3. Potentially explosive atmosphere

Turn off your electronic device when in any area with a potentially explosive atmosphere. Although this is uncommon, your electronic device could generate sparks. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death. Areas with a potentially explosive atmosphere are often but not always clearly marked.

## 4. Emergency calls

### IMPORTANT!

This *Bluetooth* headset and the electronic device connected to the headset operate using radio signals and mobile and landline networks as well as user-programmed functions, which cannot guarantee connection under all conditions. Therefore, you should never rely solely upon any electronic device for essential communications (e.g., medical emergencies). Remember, in order to make or receive calls, the headset and the electronic device connected to the headset must be switched on and in a service area with adequate mobile signal strength. Emergency calls may not be possible on all mobile phone networks or when certain network services and/or phone features are in use. Check with your local service provider.

## 5. Battery information

A rechargeable battery has a long service life if treated properly. A new battery or one that has not been used for a long period of time could have reduced capacity the first few times it is used. Do not expose the battery to extreme temperatures, never above +50°C (+122°F) or below -10°C (+14°F). For maximum battery capacity, use the battery at room temperature. If the battery is used in low temperatures, the battery capacity will be reduced. The battery can only be charged in temperatures between +10°C (+50°F) and +45°C (+113°F).

## 6. Recycling the battery in your *Bluetooth* headset

The battery in your *Bluetooth* headset must be disposed of properly and should never be placed in municipal waste. The LG Electronics service partner that removes the battery will dispose of it according to local regulations.

In case rechargeable battery is included in this product, the entire device should be recycled in compliance with rechargeable battery recycling standards because of the internal battery.

To dispose of properly, call (800) 822-8837 or visit [www.call2recycle.org](http://www.call2recycle.org).

## 7. Conditions

- The warranty is valid only if the original receipt issued to the original purchaser by the dealer, specifying the date of purchase and serial number, is presented with the product to be repaired or replaced. LG Electronics reserves the right to refuse warranty service if this information has been removed or changed after the original purchase of the product from the dealer.
- If LG Electronics repairs or replaces the product, the repaired or replaced product shall be warranted for the remaining time of the original warranty period or for ninety (90) days from the date of repair, whichever is longer. Repair or replacement may involve the use of functionally equivalent reconditioned units. Replaced parts or components will become the property of LG Electronics.

- This warranty does not cover any failure of the product due to normal wear and tear, or due to misuse, including but not limited to use in other than the normal and customary manner, in accordance with instructions for use and maintenance of the product. Nor does this warranty cover any failure of the product due to accident, modification or adjustment, acts of God, or damage resulting from liquid.
- This warranty does not cover product failures due to improper repair installations, modifications, or service performed by a non-LG Electronics authorized person. Tampering with any of the seals on the product will void the warranty.
- THERE ARE NO EXPRESS WARRANTIES, WHETHER WRITTEN OR ORAL, OTHER THAN THIS PRINTED INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO THE DURATION OF THIS LIMITED WARRANTY. IN NO EVENT SHALL LG ELECTRONICS OR ITS VENDORS BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY NATURE WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOST PROFITS OR COMMERCIAL LOSS, TO THE FULL EXTENT THOSE DAMAGES CAN BE DISCLAIMED BY LAW.
- Some countries/states do not allow the exclusion or limitation of incidental or consequential damages, or limitation of the duration of implied warranties, so the preceding limitations or exclusions may not apply to you. The warranty provided does not affect the consumer's statutory rights under applicable national legislation in force, nor the consumer's rights against the dealer arising from their sales/purchase contract.

## Limited Warranty

Subject to the conditions of this Limited Warranty, LG Electronics warrants this product to be free from defects in design, material, and workmanship at the time of its original purchase by a consumer, and for a subsequent period of one (1) year. Should your product need warranty service, please return it to the dealer from whom it was purchased or contact your local LG Electronics contact center to get further information.

## Important Safety Information

### Avoiding hearing damage

Permanent hearing loss may occur if you use your headset at a high volume.

Set the volume to a safe level. Over time you can become accustomed to a higher volume that may sound normal but can be damaging to your hearing.

If you experience ringing in your ears or muffled speech, stop listening and have your hearing checked. The louder the volume, the less time that is required before your hearing could be affected.

Hearing experts suggest that to protect your hearing:

- Limit the amount of time you use the headset at a high volume.
- Avoid turning up the volume to block out noisy surroundings.
- Turn the volume down if you can't hear people speaking near you.



You may suffer hearing damage if you switch from speaker mode to earphone mode at maximum volume. Make sure you turn the volume down before switching to earphone mode.

### Using headsets safely

Use of headsets to listen to music while operating a vehicle is not recommended and is illegal in some areas. Be careful and attentive while driving. Stop using this device if you find it disruptive or distracting while operating any type of vehicle or performing any other activity that requires your full attention.

## Open Source Software Notice

This product from LG Electronics, Inc. contains the open source software detailed below. Please refer to the indicated open source licenses (as are included following this notice) for the terms and conditions of their use.

| Open Source    | License                             | Copyright |
|----------------|-------------------------------------|-----------|
| FreeRTOS 8.2.3 | GPL-2.0-with-freertos-exception-2.0 | -         |

The source code for the above may be obtained free of charge of LG Electronics, Inc. at <http://opensource.lge.com>. LG Electronics, Inc. will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping, and handling) upon email request to [opensource@lge.com](mailto:opensource@lge.com). This offer is valid for a period of three years after our last shipment of this product. This offer is valid to anyone in receipt of this information.

Please be informed that LG Electronics, Inc. product may contain open source software listed in the tables below.

| Open Source     | License      | Copyright                            |
|-----------------|--------------|--------------------------------------|
| Mbed TLS 2.16.0 | Apache-2.0   | Copyright (c) 2006-2015, ARM Limited |
| -               | BSD-2-Clause | Copyright (c) 2005, Colin Percival.  |

### Apache-2.0

Apache License

Version 2.0, January 2004

<http://www.apache.org/licenses/>

#### TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

##### 1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit)

alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and

- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY,

or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

## END OF TERMS AND CONDITIONS

### APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");  
you may not use this file except in compliance with the License.  
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

## BSD-2-Clause

Copyright (c) <year> <owner> All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## GPL-2.0-with-freertos-exception-2.0

Any FreeRTOS source code, whether modified or in its original release form, or whether in whole or in part, can only be distributed by you under the terms of the GNU General Public License plus this exception. An independent module is a module which is not derived from or based on FreeRTOS.

EXCEPTION TEXT:

Clause 1

Linking FreeRTOS statically or dynamically with other modules is making a combined work based on FreeRTOS. Thus, the terms and conditions of the GNU General Public License cover the whole combination.

As a special exception, the copyright holder of FreeRTOS gives you permission to link FreeRTOS with independent modules that communicate with FreeRTOS solely through the FreeRTOS API interface, regardless of the license terms of these independent modules, and to copy and distribute the resulting combined work under terms of your choice, provided that

- + Every copy of the combined work is accompanied by a written statement that details to the recipient the version of FreeRTOS used and an offer by yourself to provide the FreeRTOS source code (including any modifications you may have made) should the recipient request it.

- + The combined work is not itself an RTOS, scheduler, kernel or related product.
- + The independent modules add significant and primary functionality to FreeRTOS and do not merely extend the existing functionality already present in FreeRTOS.

## Clause 2

FreeRTOS may not be used for any competitive or comparative purpose, including the publication of any form of run time or compile time metric, without the express permission of Real Time Engineers Ltd. (this is the norm within the industry and is intended to ensure information accuracy).

The standard GPL exception text:

### GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

### Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights.

These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it. For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all. The precise terms and conditions for copying, distribution and modification follow.

## GNU GENERAL PUBLIC LICENSE

### TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you". Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.
1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program. You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.
2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:
  - a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
  - b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
  - c) If the modified program normally reads commands interactively when run, you must cause it,

when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it. Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program. In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:
  - a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
  - b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
  - c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.) The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable. If distribution of executable or

object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.
6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program. If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances. It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice. This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.
8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that

distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.
10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

#### NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.
12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. END OF TERMS AND CONDITIONS

**How to Apply These Terms to Your New Programs** If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found. <one line to give the program's

name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License\*\* as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software

Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail. If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details. The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker. <signature of Ty Coon>, 1 April 1989 Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.





MANUAL DEL USUARIO

# LG TONE Style

Auriculares Estéreo Inalámbricos con **Bluetooth®**

---

Lea la Información Importante de Seguridad para poder utilizar este producto correctamente. Después de leerla, guarde este Manual del Usuario en un lugar al que todos los usuarios puedan acceder fácilmente.

Rev 1.0 US

**NOTA:** Lea toda la información detenidamente antes de utilizar los auriculares para obtener el mejor rendimiento y evitar daños en el producto.

## HBS-SL6S / HBS-SL5

[www.lg.com](http://www.lg.com)

Copyright © 2019 LG Electronics Inc. Todos los derechos reservados.

## Contenido

|                                                 |    |
|-------------------------------------------------|----|
| Precauciones de Seguridad.....                  | 1  |
| Precauciones de Uso del Producto.....           | 2  |
| Altavoz HD.....                                 | 2  |
| Componentes del Producto.....                   | 3  |
| Descripción del Producto .....                  | 4  |
| Encendido/Apagado.....                          | 4  |
| Emparejamiento y Conexión .....                 | 5  |
| Luz Indicadora.....                             | 7  |
| Funciones de Llamada con Dispositivo Móvil..... | 7  |
| Reproducción de Música .....                    | 8  |
| Modo de Altavoz (Solamente HBS-SL6S).....       | 9  |
| Alertas y Carga de la Batería.....              | 9  |
| Configuración de la Alerta de Vibración .....   | 10 |
| Fuera de Alcance .....                          | 10 |
| LG Tone & Talk.....                             | 10 |
| Solución de Problemas.....                      | 11 |
| Especificaciones y Funciones.....               | 12 |
| Aviso de Conformidad .....                      | 13 |
| Información Adicional.....                      | 14 |
| Garantía Limitada.....                          | 17 |
| Información Importante de Seguridad.....        | 17 |
| Open Source Software Notice .....               | 18 |

El LG TONE Style(HBS-SL6S) / LG TONE Style(HBS-SL5) es un auricular inalámbrico liviano que utiliza tecnología *Bluetooth*.

Este producto se puede utilizar como un accesorio de audio para dispositivos que admiten perfiles A2DP o manos libres *Bluetooth*.

## Precauciones de Seguridad

### PRECAUCIÓN

No desmonte, ajuste ni repare el producto arbitrariamente.

No ubique el producto cerca de calor excesivo o materiales inflamables.

No sustituya arbitrariamente la batería, ya que podría explotar.

El producto podría sufrir daños si se utiliza un cargador incompatible.

Asegúrese de que los bebés y los niños no se traguen imanes ni otros componentes pequeños del producto.

Asegúrese de que no entren objetos extraños en los conectores del cargador (puerto de carga y enchufe de alimentación). De lo contrario, podría provocar descargas eléctricas o incendios.

Si tiene un dispositivo médico implantado, póngase en contacto con su doctor o médico antes de utilizar este producto.

Por su seguridad, no quite la batería que viene incorporada en el producto.

La batería de polímero de iones de litio es un componente peligroso que puede causar lesiones.

Su dispositivo se puede dañar si el reemplazo de la batería lo realiza un profesional no calificado.

Para prevenir un consumo innecesario de energía, desconecte el dispositivo una vez esté totalmente cargado. Utilice siempre una base de toma de corriente cerca del equipo y fácilmente accesible.

### ADVERTENCIA

No deje caer el producto desde lugares altos.

Asegúrese de que el producto no entre en contacto con agua, alcohol ni benceno.

No guarde el producto en lugares húmedos o llenos de polvo.

No coloque objetos pesados sobre el producto.

Este producto no es impermeable. Evite la humedad y el agua.

## Precauciones de Uso del Producto

Consulte la siguiente información al utilizar el producto para que tenga una vida útil normal.

|                                                                                   |                                                                     |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------|
|  | No tire del cable del auricular con excesiva fuerza.                |
|  | Si el producto está expuesto a sudor excesivo, límpielo.            |
|  | Mantenga siempre limpia la almohadilla del auricular.               |
|  | Por su seguridad, no utilice el producto mientras se está cargando. |

## Altavoz HD

Si la red de comunicación del dispositivo que desea conectar admite llamadas de voz HD, podrá realizar llamadas y escuchar música en alta definición.

## Componentes del Producto



LG TONE Style HBS-SL6S /  
LG TONE Style HBS-SL5  
(adaptadores de silicona  
medianos instalados)



Adaptadores de Silicona Extra  
(pequeños y grandes)



Cable de Carga USB Type C™



Manual de Usuario



Documento de Garantía

NOTA: El diseño real del producto puede diferir de las imágenes que aparecen en este manual.

### **⚠ PRECAUCIÓN**

Utilice solo componentes genuinos de LG Electronics. Si utiliza un componente que no es genuino, se podría dañar el producto y, por lo tanto, anular la garantía.


Use el cable USB Type C™ que se incluye con el producto.

### **❗ NOTA**

El manual completo está disponible para descargar desde el sitio web de LG Electronics.

 [www.lg.com](http://www.lg.com) > Support > Manuals & Documents > Browse by Product > Mobile Devices > LG Bluetooth Devices

## Descripción del Producto

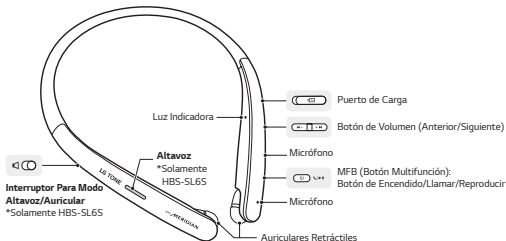

\* La función de altavoz solo se soporta en el modelo HBS-SL6S. En el modelo HBS-SL5 que no soporta la función de Altavoz, no hay Interruptor Para Modo Altavoz/Auricular.

La apariencia y las especificaciones del producto real pueden variar dependiendo del modelo.

NOTA: Para evitar la pérdida de la audición, se reproducirá un control de sonido dos veces o prolongado cuando el volumen sea muy alto.

## Encendido/Apagado

| Función   | Descripción                                                |
|-----------|------------------------------------------------------------|
| Encendido | Mantenga presionado el <b>MFB</b> durante dos segundos.    |
| Apagado   | Mantenga presionado el <b>MFB</b> durante cuatro segundos. |

\* El LED azul parpadea y se escucha una alerta cuando enciende o apaga el producto.

## Emparejamiento y Conexión

Póngase los auriculares para emparejarlos y conectarlos fácilmente siguiendo las instrucciones de voz.



NOTA: Si el sistema le solicita el código de autorización (código PIN), escriba **0000**.

Si escucha que el nivel de batería es insuficiente, cargue la batería antes de continuar con el emparejamiento.

Si el emparejamiento no se completa en un plazo de tres minutos, el producto se apagará automáticamente. Si esto ocurre, mantenga presionado el **MFB** durante dos segundos para encender la alimentación.



### Conexión rápida



- 1 Active la función **Bluetooth** desde el menú **Ajustes** del dispositivo móvil.
- 2 En los auriculares, mantenga presionado el **MFB** durante dos segundos para encender la alimentación.
- 3 Se encenderá la **Luz Indicadora** azul y los audífonos accederán al modo de búsqueda.
- 4 En el teléfono móvil o dispositivo, seleccione [LG HBS-XXXX] para conectarse.

NOTA: En la indicación anterior, HBS-XXX es un número de modelo único del producto y puede diferir dependiendo del modelo (por ejemplo, en el caso del modelo HBS-SL6S, se visualiza LG HBS-SL6S).

- 5 Se escuchará un mensaje de voz en el que se indica que la conexión se ha establecido.

### Emparejamiento Rápido


- 1 Active la función **Bluetooth** desde el menú **Ajustes** del dispositivo móvil.
- 2 En los auriculares, mantenga presionado el **MFB** durante dos segundos para encender la alimentación.
- 3 Se encenderá la **Luz Indicadora** azul y los audífonos accederán al modo de búsqueda.
- 4 Seleccione el teléfono móvil cuya pantalla está desbloqueada o un dispositivo cercano para ser conectado y conéctelo a los audífonos de acuerdo con las instrucciones visualizadas en la pantalla.

- 5 Se escuchará un mensaje de voz en el que se indica que la conexión se ha establecido.

NOTA: Solo soporta Android™ 6.0 o superiores.

Antes de conectar los audífonos, configure el dispositivo móvil o el dispositivo que desee conectar para utilizar la información de ubicación.

## Conexión Manual (emparejamiento con otro teléfono o volver a emparejar)



- 1 Mientras los auriculares están apagados, presione el **MFB** y el **Botón de Volumen (Anterior ◀ ▶)** simultáneamente durante dos segundos o más.
- 2 Se encenderá la **Luz Indicadora** azul y los audífonos cambiarán al modo de búsqueda.
- 3 En el teléfono móvil o dispositivo, seleccione [LG HBS-XXX] para conectarse.

NOTA: En la indicación anterior, HBS-XXX es un número de modelo único del producto y puede diferir dependiendo del modelo (por ejemplo, en el caso del modelo HBS-SL6S, se visualiza LG HBS-SL6S).

## Múltiples Conexiones

Los auriculares pueden ser conectados a dos dispositivos, como un celular y una computadora, simultáneamente.

NOTA: Si los audífonos están conectados simultáneamente a dos dispositivos, las funciones principales operan según el "dispositivo principal conectado".

- 1 Para conectar múltiples dispositivos, apague los auriculares mientras el producto está conectado a un dispositivo.
- 2 Siga los pasos 1 al 3 que se indican en "Conexión manual". Este dispositivo se convierte en el "dispositivo principal conectado".
- 3 Intente conectarse a los audífonos mediante un dispositivo conectado previamente. Este dispositivo se convertirá en el "dispositivo secundario conectado".

## Reconexión Automática


Si enciende los audífonos, se conectarán automáticamente al último dispositivo (dispositivo principal o secundario conectado) al que estuvieron conectados. (Si no se puede encontrar un dispositivo, se activará el modo de búsqueda).

Si el producto no se conecta automáticamente al dispositivo deseado, búsquelo en el dispositivo al que desea conectarse y conéctelo manualmente.

## Luz Indicadora

| Estado                                                       | Descripción                                                            |
|--------------------------------------------------------------|------------------------------------------------------------------------|
| Encendido/Apagado                                            | La <b>Luz Indicadora</b> azul parpadeará.                              |
| Modo de Búsqueda                                             | La <b>Luz Indicadora</b> azul permanece encendida.                     |
| Perfil de Audífonos/Manos Libres Conectado/Llamada Conectada | La <b>Luz Indicadora</b> parpadeará de color azul cada cinco segundos. |

## Funciones de Llamada con Dispositivo Móvil




| Función               | Estado                          | Descripción                                                                                                                                          |
|-----------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Responder una Llamada | Suena                           | Presione brevemente el <b>MFB</b> .<br>NOTA: Los audífonos no vibrarán si la función de vibración está desactivada.                                  |
| Hacer una Llamada     | Inactivo                        | Si realiza una llamada con un teléfono móvil, la llamada se conectará automáticamente a los audífonos.                                               |
| Cambiar de Llamada    | Conversación                    | Mantenga presionado el <b>Botón de Volumen (Siguiente + ►)</b> durante un segundo para cambiar la llamada entre los auriculares y el teléfono móvil. |
| Marcación por Voz     | Inactivo/<br>Música<br>Activada | Presione brevemente el <b>MFB</b> para activar la voz de los audífonos.                                                                              |

| Función                                              | Estado       | Descripción                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recepción de una Llamada Mientras Habla por Teléfono | Conversación | Mientras está al teléfono, puede presionar el <b>MFB</b> brevemente para recibir otra llamada.<br>La llamada actual cambiará al estado de llamada en espera. Presione brevemente el <b>MFB</b> para volver a la llamada anterior.<br>Si la llamada anterior está en espera, puede finalizar la llamada actual desde el teléfono celular. (El funcionamiento puede variar dependiendo de la configuración del teléfono móvil). |
| Rechazar una Llamada                                 | Suena        | Presione brevemente el <b>MFB</b> dos veces.                                                                                                                                                                                                                                                                                                                                                                                  |
| Activación y Desactivación de Volumen                | Conversación | Mantenga presionado el <b>Botón de Volumen (Anterior ◀ -)</b> durante un segundo.                                                                                                                                                                                                                                                                                                                                             |
| Subir Volumen/<br>Bajar Volumen                      | Conversación | Presione brevemente el <b>Botón de Volumen (Siguiente + ▶)</b> o el <b>Botón de Volumen (Anterior ◀ -)</b> .                                                                                                                                                                                                                                                                                                                  |

NOTA: La función de marcado por voz opera en el dispositivo principal conectado o en el dispositivo en el que se hizo la última llamada. (La función de marcado por voz podría operar de forma diferente según el teléfono celular que se utilice.)

## Reproducción de Música



| Función    | Estado          | Descripción                         |
|------------|-----------------|-------------------------------------|
| Reproducir | Inactivo        | Presione brevemente el <b>MFB</b> . |
| Pausar     | Música Activada | Presione brevemente el <b>MFB</b> . |


| Función                                  | Estado          | Descripción                                                                                                                                                                                                                                      |
|------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reproducir la Canción Anterior/Siguiente | Música Activada | Mantenga presionado el <b>Botón de Volumen (Siguiente + ►)</b> durante un segundo para reproducir la canción siguiente.<br>Mantenga presionado el <b>Botón de Volumen (Anterior ◀ -)</b> durante un segundo para reproducir la canción anterior. |
| Subir Volumen/ Bajar Volumen             | Música Activada | Presione brevemente el <b>Botón de Volumen (Siguiente + ►)</b> o el <b>Botón de Volumen (Anterior ◀ -)</b> .                                                                                                                                     |
| Cambio de Modo del Ecualizador           | Música Activada | Mantenga presionado el <b>Botón de Volumen (Siguiente + ►)</b> y el <b>Botón de Volumen (Anterior ◀ -)</b> simultáneamente durante un segundo para ir al siguiente paso.<br>Mejora de graves (Predeterminado) > Normal > Mejora de agudos.       |

## Cambio de reproductor de música

Para cambiar a un dispositivo de reproducción de música distinto cuando hay varios dispositivos conectados, detenga la música actual y reproduzca en el dispositivo de su elección.


## Modo de Altavoz (Solamente HBS-SL6S)

Si desliza el **Interruptor Para Modo Altavoz/Auricular** a la posición Modo de altavoz, se activará el modo de altavoz en el dispositivo.



## Alertas y Carga de la Batería

Abra la tapa del **Puerto de Carga** y conecte el cargador al **Puerto de Carga**.




| Luz indicadora       | Roja     | Morada | Azul       |
|----------------------|----------|--------|------------|
| Estado de la batería | Cargando | 80 %   | Completado |

Los audífonos se apagan mientras están siendo cargados.

NOTA: Si la temperatura es demasiado alta o demasiado baja, la luz indicadora de estado parpadea en rojo y la batería no es cargada.


Para más información acerca de la batería, vaya a [Información Adicional] > [5. Información sobre la batería].

Mantenga presionado el **Botón de Volumen (Anterior ◀ —)** durante un segundo. en el modo de espera para verificar la luz indicadora y el nivel de batería con la voz.



| Estado de la batería | Suficiente             | Normal                   | Insuficiente           |
|----------------------|------------------------|--------------------------|------------------------|
| Luz indicadora       | Parpadea en color azul | Parpadea en color morado | Parpadea en color rojo |

## Configuración de la Alerta de Vibración



Los audífonos se configuran en Alerta por vibración por defecto. Para habilitar o deshabilitar la Alerta por vibración, mantenga presionado el **Botón de Volumen (Siguiente + ▶)** durante dos segundos en el modo de inactividad.

NOTA: Si desactiva las alertas vibratorias, no vibrarán ni siquiera cuando reciba una llamada o esté fuera del alcance de comunicación.

## Fuera de Alcance

Si el dispositivo conectado al producto está fuera del rango de comunicación efectiva, la señal de comunicación se volverá débil y se perderá la comunicación. El alcance de comunicación efectivo puede variar dependiendo del entorno y otras condiciones.

Si el dispositivo vuelve a estar dentro del alcance efectivo de comunicación, el producto se volverá a conectar automáticamente al dispositivo. Si el dispositivo no se vuelve a conectar automáticamente, presione el **MFB** del producto para conectarse de forma manual.

Si un dispositivo que no está en uso queda fuera del rango de comunicación mientras está conectado a varios dispositivos, el producto vibrará y recibirá un mensaje de voz que le avisará que se perdió la conexión. En este caso, la función de reconexión automática no es compatible.

## LG Tone & Talk

Tone & Talk admite varias funciones, incluidas las indicaciones de texto y voz y las llamadas. Busque "LG Tone & Talk" en la tienda Google Play (SO Android™) o en App Store® (iOS) para instalar Tone & Talk. Puede escanear el código QR de la derecha para instalar Tone & Talk.

NOTA: Algunas funciones de Tone & Talk podrían no estar disponibles en dispositivos iOS.



Google Play



App Store

| Función                            | Descripción                                                                                                                                 |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Notificación por Voz               | Si ajusta Notificación por voz en Activado, leerá los mensajes SMS, MMS y de redes sociales con la voz.                                     |
| Notificación de Vibración          | Podrá configurar la activación y desactivación de notificaciones de vibración en Configuración de notificación.                             |
| Verificar Batería de los Audífonos | Puede verificar la cantidad de batería de los audífonos desde la pantalla de la aplicación.                                                 |
| Cambiar Modo de Ecualizador        | En el menú del ecualizador puede cambiar el modo del ecualizador. (El modo de ecualizador no puede cambiarse en el modo de altavoz).        |
| Actualización de Software          | Cuando haya una actualización de software para los audífonos, recibirá una notificación de la actualización y podrá actualizar el software. |

## Solución de Problemas

| Problemas                                             | Soluciones                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| El dispositivo no enciende                            | Compruebe el nivel de carga de la batería y cárguela.                                                                                                                                                                                                                                                        |
| No se puede hacer una llamada con los audífonos       | Si el teléfono móvil no admite las funciones de audífonos y manos libres, no podrá utilizar las funciones de llamada.<br>Compruebe el nivel de carga de la batería y cárguela.                                                                                                                               |
| No se pueden conectar los audífonos al teléfono móvil | Compruebe si los audífonos están encendidos.<br>Compruebe si los audífonos están en el modo de búsqueda.<br>- Para cambiar al modo de búsqueda, mantenga pulsado el <b>MFB</b> y el <b>Botón de Volumen (Anterior ◀ ▶)</b> simultáneamente durante dos segundos o más mientras los audífonos están apagados. |
| El nivel de sonido es bajo                            | Controle el nivel de sonido del dispositivo conectado a los audífonos.                                                                                                                                                                                                                                       |

## Especificaciones y Funciones

| Ítem                                                                                         | HBS-SL6S                                                | HBS-SL5         |
|----------------------------------------------------------------------------------------------|---------------------------------------------------------|-----------------|
| Especificaciones de la Tecnología <i>Bluetooth</i>                                           | V 5.0 (Auricular/Manos Libres/A2DP/AVRCP)               |                 |
| Batería                                                                                      | Batería de polímero de iones de litio de 3,7 V / 75 mAh |                 |
| Tiempo en Espera<br>(Tiempo en Espera en el Modo de Altavoz)                                 | Hasta 450 horas*<br>(Modo de Altavoz: Hasta 400 horas*) | Hasta 450 horas |
| Tiempo de Conversación<br>(Tiempo de Conversación en el Modo de Altavoz)                     | Hasta 8 horas*<br>(Modo de Altavoz: Hasta 4 horas*)     | Hasta 8 horas*  |
| Tiempo de Reproducción de Música<br>(Tiempo de Reproducción de Música en el Modo de Altavoz) | Hasta 8 horas*<br>(Modo de Altavoz: Hasta 3 horas*)     | Hasta 8 horas*  |
| Peso                                                                                         | 1,6 oz                                                  | 1,5 oz          |
| Dimensiones                                                                                  | 6,2" (ancho) X 7,0" (largo) X 0,7" (alto)               |                 |
| Tiempo de Carga                                                                              | Aproximadamente 1 hora                                  |                 |
| Tensión Nominal de Entrada                                                                   | 4,75 VCC - 5,3 VCC, 400 mA                              |                 |
| Temperatura Operativa                                                                        | 0 °C (+32 °F) - +35 °C (+95 °F)                         |                 |
| Frecuencia Operativa                                                                         | De 2402 MHz a 2480 MHz                                  |                 |

\* El tiempo de uso puede variar dependiendo del dispositivo móvil conectado, las funciones utilizadas, las configuraciones, la intensidad de la señal, la temperatura operativa, la banda de frecuencia y otros métodos de uso.

## Aviso de Conformidad

### AVISO DE LA FCC PARA LOS USUARIOS

Este dispositivo cumple con el artículo 15 de las Reglas de la FCC.

El funcionamiento está sujeto a las dos condiciones siguientes:

- (1) Este dispositivo no puede causar interferencia nociva,
- (2) Este dispositivo debe aceptar cualquier interferencia que reciba, incluso la que provoque un funcionamiento no deseado.

Las modificaciones o los cambios que no estén expresamente aprobados por el fabricante (o la parte responsable) del cumplimiento podrían anular la autoridad del usuario para utilizar el producto.

### Declaración del artículo 15.105

Este equipo ha sido evaluado y se ha comprobado que cumple con los límites para un dispositivo digital clase B, conforme las secciones 15 de las Reglas de la FCC.

Estos límites han sido diseñados para brindar una protección razonable contra la interferencia nociva en una instalación residencial. Este equipo genera, utiliza y puede irradiar energía de radiofrecuencia y, si no se instala y utiliza de acuerdo con las instrucciones, podría causar interferencia nociva para las comunicaciones radiales.

No obstante, no se garantiza la ausencia de interferencia en una instalación en particular.

Si este equipo causa interferencias con la señal de recepción de la radio o televisión, lo cual se verifica apagando y encendiendo el equipo, el usuario puede intentar corregir la interferencia tomando una o más de las siguientes medidas:

- Reoriente o reubique la antena receptora.
- Aumente la distancia entre el equipo y el receptor.
- Conecte el equipo en un tomacorriente que no pertenezca al mismo circuito del tomacorriente en el que está conectado el receptor.
- Consulte al distribuidor o a un técnico de radio/TV experimentado para obtener ayuda.

### NOTA IMPORTANTE:

Para satisfacer los requisitos de exposición a la radiofrecuencia estipulados por la FCC, no se permite alteración alguna de la antena o del dispositivo. Todo cambio realizado en la antena o el dispositivo podría hacer que el dispositivo supere los requisitos de exposición a la radiofrecuencia; en consecuencia, los derechos del usuario para utilizar el producto podrían quedar anulados.

*Bluetooth®* es una marca registrada de Bluetooth SIG, Inc., en todo el mundo.

Google, Android, Google Play, el logotipo de Google Play y otras marcas y logotipos relacionados son marcas comerciales de Google LLC.

Declaración de Conformidad del Proveedor

|                   |                                               |
|-------------------|-----------------------------------------------|
| Nombre Comercial  | LG                                            |
| Parte Responsable | LG Electronics USA, Inc.                      |
| Dirección         | 1000 Sylvan Ave Englewood Cliffs,<br>NJ 07632 |
| Teléfono          | (201)266-2215                                 |



HBS-SL6S FCC ID : ZNFHBSSL6S  
HBS-SL5 FCC ID : ZNFHBSSL6S

## Información Adicional

### 1. Exposición a la radiofrecuencia

Este auricular estéreo inalámbrico *Bluetooth*, es un transmisor y receptor de radio. Cuando está en funcionamiento, se comunica con un dispositivo móvil compatible con *Bluetooth* mediante la recepción y la transmisión de campos electromagnéticos (microondas) de radiofrecuencia (RF) en el rango de 2,4 a 2,4835 GHz. El auricular *Bluetooth* está diseñado para funcionar conforme a los lineamientos y los límites de exposición a la radiofrecuencia establecidos por autoridades nacionales y organismos internacionales de la salud pública, cuando se lo utiliza en conjunto con cualquier dispositivo móvil compatible de LG Electronics.

### 2. Precauciones para la conexión *Bluetooth*

Los siguientes entornos afectan el rango y la recepción de las señales *Bluetooth*:

- Cuando hay paredes, metales, cuerpos humanos u otros obstáculos entre el dispositivo *Bluetooth* y el dispositivo conectado.
- Cuando se colocan equipos que utilizan señales de frecuencia de 2,4 GHz (LAN inalámbricas, teléfonos inalámbricos, hornos microondas, etc.) cerca de los dispositivos utilizados.

### 3. Atmosferas potencialmente explosivas

Cuando se encuentre en una atmósfera potencialmente explosiva, apague el dispositivo electrónico. Aunque es poco frecuente, este dispositivo electrónico podría generar chispas. Las chispas en dichas áreas pueden causar una explosión o un incendio y provocar lesiones personales o incluso la muerte. Las zonas con riesgo de explosión suelen estar claramente señaladas, aunque no en todos los casos.

### 4. Llamadas de emergencia

¡IMPORTANTE!

Este auricular *Bluetooth* y el dispositivo electrónico conectado a él funcionan con señales de radio, redes terrestres y móviles, además de funciones programadas por el usuario, que no pueden garantizar la conexión en todas las situaciones. Por lo tanto, nunca debe depender únicamente de un dispositivo electrónico para casos de comunicaciones esenciales (por ej. emergencias médicas). Recuerde que, para realizar o recibir llamadas, el auricular y el dispositivo electrónico conectado a él deben estar encendidos y en un área de servicio con una señal móvil de buena potencia. Las llamadas de emergencia no pueden hacerse en todas las redes de telefonía celular ni cuando están en uso ciertos servicios de red o funciones del teléfono. Compruebe la disponibilidad con su proveedor de servicio local.

### 5. Información sobre la batería

Las baterías recargables tienen una vida útil prolongada si reciben el tratamiento adecuado. Las baterías nuevas o que no se hayan utilizado por mucho tiempo podrían tener una capacidad reducida las primeras veces que se utilizan. No exponga la batería a temperaturas extremas, superiores a +50 °C (+122 °F) o inferiores a -10 °C (+14 °F). Para obtener la máxima capacidad de la batería, úsela a temperatura ambiente. Si se utiliza la batería en condiciones de temperaturas bajas, la capacidad se verá reducida. La batería solo puede cargarse a temperaturas entre +10 °C (+50 °F) y +45 °C (+113 °F).

### 6. Reciclado de la batería del auricular *Bluetooth*

La batería del auricular *Bluetooth* debe desecharse con el procedimiento adecuado y nunca debe arrojarse al basurero municipal. Los encargados del servicio técnico de LG Electronics que extraigan baterías las desecharán de acuerdo con las reglamentaciones locales.

En caso de que una batería recargable se incluya en este producto, todo el dispositivo se debe reciclar de conformidad con las normas de reciclado de baterías recargables debido a la batería interna. Para averiguar el método de eliminación apropiado, llame al (800) 822- 8837 o visite [www.call2recycle.org](http://www.call2recycle.org).

## 7. Condiciones

- La garantía tiene validez únicamente si, junto con el producto que se va a reparar o reemplazar, se presenta la factura original que el distribuidor le emitió al comprador original. LG Electronics se reserva el derecho de denegar el servicio de garantía si no se presenta dicha información o si hubiera habido modificaciones luego de la compra original del producto al distribuidor.
- Si LG Electronics repara o reemplaza el producto, el plazo de garantía del producto reemplazado o reparado equivaldrá al tiempo restante del plazo de la garantía original o noventa (90) días a partir de la fecha de reparación, el período que sea mayor. La reparación o el reemplazo podrían implicar el uso de unidades reacondicionadas con funciones equivalentes. Los componentes o las piezas reemplazadas pasarán a ser propiedad de LG Electronics.
- La presente garantía no cubre fallas por desgaste natural ni uso indebido, entre otros casos, usos fuera de lo normal y habitual, conforme a las instrucciones de uso y mantenimiento del producto. La cobertura tampoco abarca fallas del producto que se deban a accidentes, modificaciones o ajustes, caso fortuito o daño producido por algún líquido.
- La garantía no cubre fallas del producto a causa de instalaciones, reparaciones o modificaciones incorrectas llevadas a cabo por personas que no estén autorizadas por LG Electronics. Todo indicio de manipulación en cualquiera de los sellos del producto anulará la garantía.
- NO EXISTEN GARANTÍAS EXPRESAS, NI ORALES NI ESCRITAS, SALVO LAS QUE CONSTAN EN EL PRESENTE DOCUMENTO, INCLUYENDO, ENTRE OTRAS, LAS GARANTÍAS IMPLÍCITAS DE COMERCIALIZACIÓN O IDONEIDAD PARA UN FIN DETERMINADO. LA DURACIÓN DE CUALQUIER GARANTÍA IMPLÍCITA SE LIMITA AL PLAZO DE LA PRESENTE GARANTÍA LIMITADA. ASIMISMO, LG ELECTRONICS O SUS DISTRIBUIDORES NO SERÁN RESPONSABLES, EN NINGUNA CIRCUNSTANCIA, POR DAÑOS FORTUITOS O EMERGENTES DE ÍNDOLE ALGUNA, INCLUYENDO, ENTRE OTROS, PÉRDIDAS COMERCIALES O DE GANANCIAS, HASTA EL MÁXIMO DESCARGO DE RESPONSABILIDAD PERMITIDO POR LA LEY.
- En algunos estados y países, no se permite la exclusión o la limitación de daños fortuitos y emergentes, ni la limitación del plazo de las garantías implícitas. Por lo tanto, las exclusiones o limitaciones de los párrafos anteriores podrían no aplicarse en su caso. La garantía provista no afecta los derechos del consumidor establecidos por la legislación nacional pertinente en vigencia ni los derechos del consumidor en relación con el distribuidor que surjan del contrato de compra-venta.

## Garantía Limitada

Sujeta a las condiciones de la presente garantía limitada, LG Electronics garantiza que este producto no presenta fallas de diseño, materiales ni mano de obra en el momento en que el consumidor realiza la compra original, y que no las presentará por un período posterior de un (1) año. En caso de que el producto requiera servicio técnico de garantía, sírvase llevarlo al establecimiento del distribuidor que se lo vendió o comuníquese con el centro de contacto de LG Electronics de su región para obtener más información.

## Información Importante de Seguridad

### Reducción de la capacidad auditiva

Si utiliza el auricular con un nivel de volumen alto, podría sufrir hipoacusia permanente.

Configure el volumen en un nivel inocuo. Con el tiempo, podría acostumbrarse a un volumen de sonido más alto que podría parecer normal, pero que podría dañar su capacidad auditiva.

Si le zumban los oídos o siente que los sonidos le llegan medio apagados, no utilice el dispositivo y consulte a un otorrinolaringólogo. Cuanto más alto sea el volumen, más rápido podría verse afectada su audición.

Algunos expertos en audición sugieren que, para proteger la audición, se debe:

- Limitar el tiempo de uso del auricular a volumen alto.
- Evitar subir el volumen para contrarrestar el exceso de ruido ambiental.
- Bajar el volumen si no oye a la gente que habla cerca de usted.



Es posible que dañe su capacidad auditiva si cambia del modo de altavoz al de auricular con el volumen al máximo. Asegúrese de disminuir el volumen antes de activar el modo de auricular.

### Uso seguro de los auriculares

No se recomienda utilizar auriculares para escuchar música mientras conduce un vehículo y, en algunas zonas, es ilegal hacerlo. Sea precavido y cauto al conducir. No utilice el dispositivo si le resulta molesto o lo distrae mientras maneja cualquier tipo de vehículo o realiza alguna otra actividad que requiera toda su atención.

## Open Source Software Notice

This product from LG Electronics, Inc. contains the open source software detailed below. Please refer to the indicated open source licenses (as are included following this notice) for the terms and conditions of their use.

| Open Source    | License                             | Copyright |
|----------------|-------------------------------------|-----------|
| FreeRTOS 8.2.3 | GPL-2.0-with-freertos-exception-2.0 | -         |

The source code for the above may be obtained free of charge of LG Electronics, Inc. at <http://opensource.lge.com>. LG Electronics, Inc. will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping, and handling) upon email request to [opensource@lge.com](mailto:opensource@lge.com). This offer is valid for a period of three years after our last shipment of this product. This offer is valid to anyone in receipt of this information.

Please be informed that LG Electronics, Inc. product may contain open source software listed in the tables below.

| Open Source     | License      | Copyright                            |
|-----------------|--------------|--------------------------------------|
| Mbed TLS 2.16.0 | Apache-2.0   | Copyright (c) 2006-2015, ARM Limited |
| -               | BSD-2-Clause | Copyright (c) 2005, Colin Percival   |

### Apache-2.0

Apache License

Version 2.0, January 2004

<http://www.apache.org/licenses/>

#### TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

##### 1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit)

alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and

- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY,

or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. **Limitation of Liability.** In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
9. **Accepting Warranty or Additional Liability.** While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

## END OF TERMS AND CONDITIONS

### APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets `[]` replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");  
you may not use this file except in compliance with the License.  
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

## BSD-2-Clause

Copyright (c) <year> <owner> All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## GPL-2.0-with-freertos-exception-2.0

Any FreeRTOS source code, whether modified or in its original release form, or whether in whole or in part, can only be distributed by you under the terms of the GNU General Public License plus this exception. An independent module is a module which is not derived from or based on FreeRTOS.

EXCEPTION TEXT:

### Clause 1

Linking FreeRTOS statically or dynamically with other modules is making a combined work based on FreeRTOS. Thus, the terms and conditions of the GNU General Public License cover the whole combination.

As a special exception, the copyright holder of FreeRTOS gives you permission to link FreeRTOS with independent modules that communicate with FreeRTOS solely through the FreeRTOS API interface, regardless of the license terms of these independent modules, and to copy and distribute the resulting combined work under terms of your choice, provided that

- + Every copy of the combined work is accompanied by a written statement that details to the recipient the version of FreeRTOS used and an offer by yourself to provide the FreeRTOS source code (including any modifications you may have made) should the recipient request it.

- + The combined work is not itself an RTOS, scheduler, kernel or related product.
- + The independent modules add significant and primary functionality to FreeRTOS and do not merely extend the existing functionality already present in FreeRTOS.

## Clause 2

FreeRTOS may not be used for any competitive or comparative purpose, including the publication of any form of run time or compile time metric, without the express permission of Real Time Engineers Ltd. (this is the norm within the industry and is intended to ensure information accuracy).

The standard GPL exception text:

### GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

#### Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights.

These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it. For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all. The precise terms and conditions for copying, distribution and modification follow.

## GNU GENERAL PUBLIC LICENSE

### TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you". Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.
1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program. You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.
2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:
  - a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
  - b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
  - c) If the modified program normally reads commands interactively when run, you must cause it,

when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it. Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program. In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:
  - a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
  - b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
  - c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.) The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable. If distribution of executable or

object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.
6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program. If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances. It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice. This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.
8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that

distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.
10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

#### NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.
12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. END OF TERMS AND CONDITIONS

**How to Apply These Terms to Your New Programs** If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found. <one line to give the program's

name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License\*\* as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software

Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail. If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details. The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker. <signature of Ty Coon>, 1 April 1989 Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.





Any modifications or changes to this manual due to typographical errors or inaccuracies of stated information shall only be made by LG Electronics Inc.

Las modificaciones o cambios de este manual por errores tipográficos o de información serán realizados exclusivamente por LG Electronics, Inc.

**[www.lg.com](http://www.lg.com)**