




Smart Pet Feeder

User manual

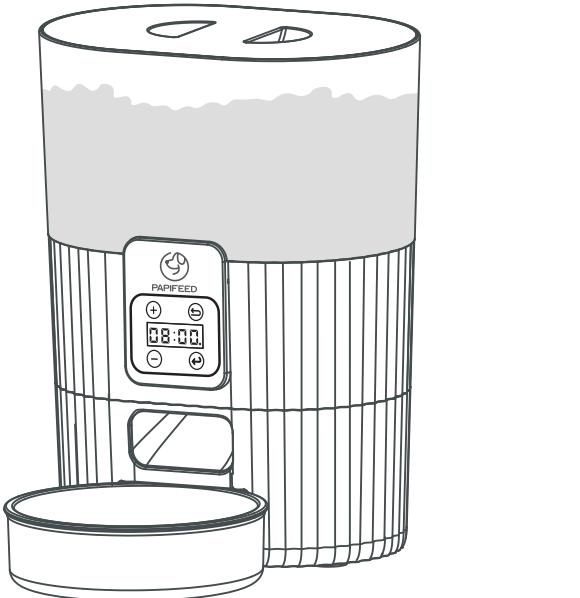

Please Read It Carefully And Keep It Properly Before Using The Product

Daily Feeding

(dog) weight	Normal activity	Increase	(dog) weight	Normal activity	Increase
2kg	39g	45g	8kg	111g	128g
4kg	66g	76g	10kg	131g	152g
6kg	89g	104g	12kg	150g	174g

(dog) weight	Normal activity	Increase	(dog) weight	Normal activity	Increase
14kg	178g	206g	235g	20kg	233g
16kg	197g	228g	259g	22kg	250g
18kg	197g	228g	259g	24kg	267g


(dog) weight	Normal activity	Increase	(dog) weight	Normal activity	Increase
26kg	274g	318g	361g	36kg	350g
28kg	290g	336g	381g	38kg	364g
30kg	305g	353g	402g	40kg	379g
32kg	320g	371g	422g	42kg	393g
34kg	335g	388g	441g	44kg	407g

(cat) Month	1~2	2~4	4~6	6~8	8~12
Suggest	20~30g	30~50g	50~70g	70~80g	80~90g

(cat) weight	2~3kg	3~5kg	5~7kg	pregnancy	Lactation period
Suggest	25~35g	35~55g	55~85g	70~110g	120~190g

If the pet fail to eat up the previous programmed meal,please reduce the next meal portion.


Component Breakdown

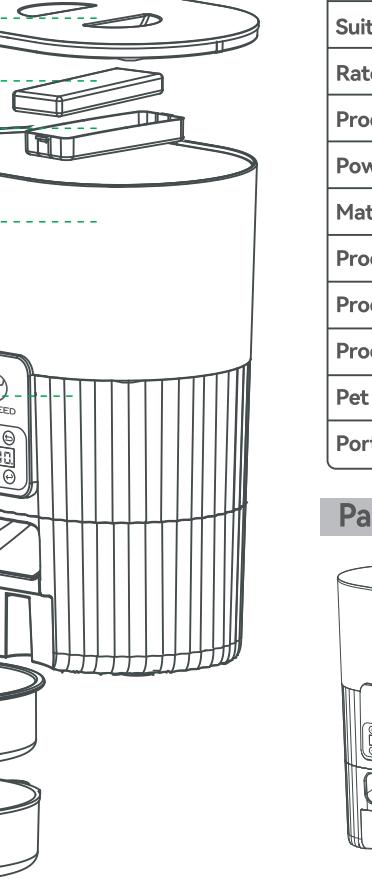


Product Specifications

Product Name	Smart Pet Feeder
Suit For	Cat,Dog,Rabbit,Squirrel,Small Pets
Rated Voltage	5V 1A
Product Power	5W
Power Supply	DC 5V Adapter & 4*AA Alkaline Battery
Material	Echo-Friendly ABS
Product Size	208*148*277mm 8.2*5.8*10.9in
Product Weight	1kg 2.2lb
Product Capacity	3.5L
Pet Food	Dry Food
Portion Size	~20g/Portion (differed due to the different pet food density)


Packing List

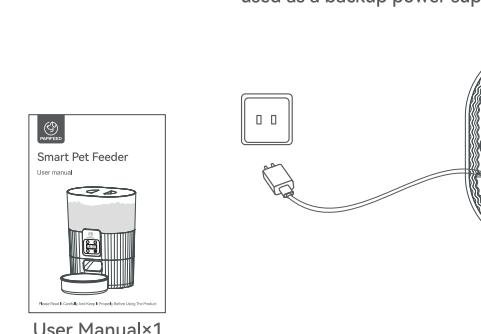

Product Hardware Assembly Steps

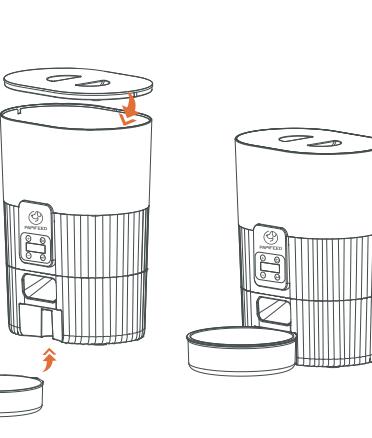


2.There are two ways to connect the power supply, you can choose to use the power adapter to connect the power supply, or you can choose to use 4 AA batteries as the power supply. (It is recommended to have two power supplies at the same time. When there is a power failure at home, AA batteries can be used as a backup power supply to prevent the feeder from stopping working).

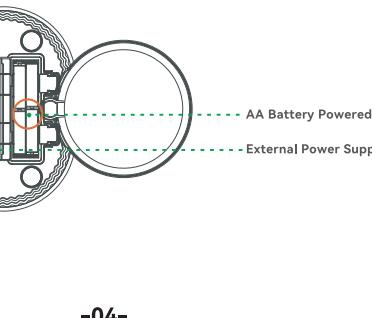


Scan for more details
www.papifeedpet.com

3. Pour the grain.

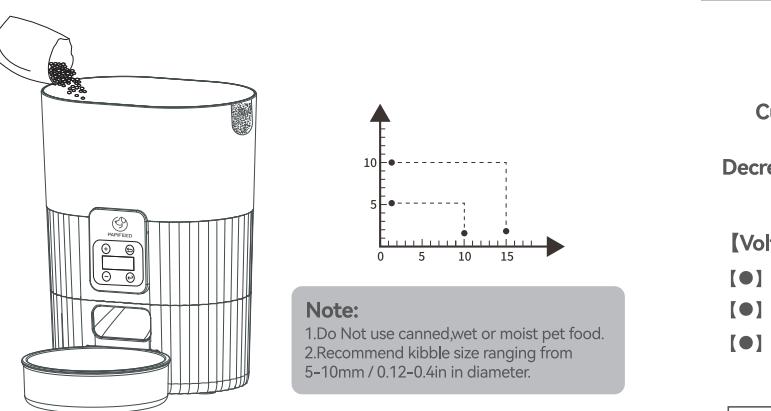

-05-

Daily Feeding

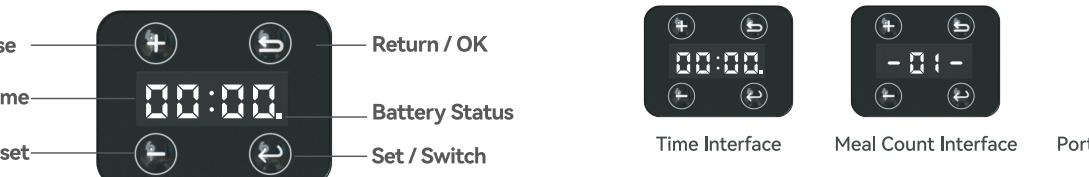

[Voltage Indicator] (On Battery Power)

- Indicator Light Disappear: Sufficient power for normal use.
- Indicator Light Appears: Low power, will automatically shut down.
- Indicator Light Blinking: Battery replacement reminder, please replace the battery immediately.

+	Press and hold on the main screen for 2s to get an immediate serving of food.
+	Long press to continuously increase data.
-	Long press to continuously reduce data.
↶	Press and hold for 3s under the main interface to enter the time setting on the main interface.
↶	Short press to save the currently set data and return to the main interface.
↶	Short press on the main interface to set the number of meals, meal time, and the number of servings per meal. (When the number of servings is set to 0, it means that there will be no food for this number of meals).
↶	In Settings, switch the parameters that need to be set.


-06-

Basic Interface Understanding



Time Setting


- Under the main interface, long press the [↶] key for 3s to set the time.



- Press the key [+/-] to increase or decrease the hours and minutes value. Press [↶] to switch between hour and minute;




- After completing the setting, press the [↶] to return to the main interface.



Manual Feeding

Long press the [+] for 2s to feed for one portion. Press once to release one portion.



Meal setting

- Under the main interface, short click the [↶] to enter into meal setting interface. There are [-01-] [-02-] [-03-] [-04-] meals.




- Press the [↶] again to enter the hours setting of the meal time, and long press the [+] or [-] to quickly set the data.



- Press [↶] further to set the minutes of meal time, and long press [+] or [-] to quickly set the data.



- Press [↶] to set the portions, adjust the value with the key [+/-];




- Tip: If enough meals have been set, you can directly press the [↶] key to complete the current meal number setting. If you need to set more meals, please press the [↶] key to enter the next meal number setting.



- After the setting is completed, press [↶] to confirm and save the settings, and prompt [---] to return to the main interface (Time interface).



Product Disassembly & Cleaning



Hosts

Note: In addition to the host part of the feeder's other assembled parts can be disassembled and cleaned.

Washable Parts



Non-Washable Parts



-09-

Q&A Trouble Shooting

Q: Why with the programmed meal, no food dispensing from the feeder?
A: Please check following:
1. There are some pet food in the food hopper.
2. If there is any error indicating on the screen.
3. Make sure you have pour into some non-sticky dry food to the feeder instead of wet and canned.

Q: If the power cord is bitten off by a pet, will it electrocute the pet?
A: Use a 5V safety voltage, no electricity to pets!

Q: Why the food hopper cannot be washed?
A: Non-detachable mainly because the simple internal structure of the product, there is no bird Angle. Press the key to release the food from the hopper and wipe out the dispensing outlet and the inner wall to keep the food fresh.

100% After Sales Service
We provide a 1-year warranty for this appliance.
Please email our support at xiiao@apifeed.cn if you have any questions, attach your order number and describe your problem in your email. We'll get back to you within 24 hours.

-10-