

120*140mm



MODEL: SN75

Keyboard lighting setting


	WIN	MAC
FN+ _	Backlight speed -	Backlight speed -
FN+ +=	Backlight speed +	Backlight speed +
FN+PGUP	Sidelight brightness +	Sidelight brightness +
FN+PGDN	Sidelight brightness -	Sidelight brightness -
FN+END	Turn on/off the backlight	Turn on/off the backlight
FN+Delete	Light mode switch/ Switching backlight mode	Light mode switch/ Switching backlight mode
FN+ ↑	Backlight brightness +	Backlight brightness +
FN+ ↓	Backlight brightness -	Backlight brightness -
FN+←	Color Switching +	Color Switching +
FN+→	Color Switching -	Color Switching -
FN+[{	Light saturation Up	Light saturation Up
FN+}]}	Light saturation Down	Light saturation Down
FN+HOME	Switching sidelight mode	Switching sidelight mode

Query power:

Long press the FN+Backspace key combination, 1~0 10 keys lights are always on display, other keys lights are not on; when the power is lower than 30%, 1~3 keys red lights are always on display; power is lower than 50%, 1~5 keys yellow lights are always on display; power is greater than 50%, 1~0 keys green lights are always on display. After releasing the key combination to restore the current light effect, and only when the battery alone can check the power supply.

Knob function:

Counterclockwise rotation function is: volume minus; press the middle key function is: pause/play; clockwise rotation function is: volume plus.



GASKET/TOP double structure swap


The default structure of the keyboard is the Gasket structure, you can change the Gasket structure to the Top structure by using the positioning plate and screws included in the package to lock the top cover.

FN key combination function

	WIN	MAC
FN+ESC	Reset function for 3S	Reset function for 3S
FN+F1	My Computer	Screen brightness -
FN+F2	browser home page	Screen brightness +
FN+F3	Calculator	Mission Control
FN+F4	Multimedia	Apps
FN+F5	Previous song	F5
FN+F6	Next song	F6
FN+F7	Pause or Play	Previous song
FN+F8	Stop	Pause or Play
FN+F9	Mute	Next song
FN+F10	Volume down	Mute
FN+F11	Volume up	Volume down
FN+F12	E-mail	Volume up
FN+A	Switch to Win system mode	Switch to Win system mode
FN+S	Switch to Mac system mode	Switch to Mac system mode
FN+1	Bluetooth 1	Bluetooth 1
FN+2	Bluetooth 2	Bluetooth 2
FN+3	Bluetooth 3	Bluetooth 3
FN+4	2.4G mode	2.4G mode
FN+5(USB mode)	Wired mode	Wired mode
FN+Backspace	Battery power query (battery power supply is valid in wireless mode)	Battery power query (battery power supply is valid in wireless mode)
FN+Win	Lock Win key (win bright white light)	Lock Win key (win bright white light)

Connection mode combination key and connection method

	WIN	MAC
Fn+1	Bluetooth 1	Bluetooth 1
Fn+2	Bluetooth 2	Bluetooth 2
Fn+3	Bluetooth 3	Bluetooth 3
Fn+4	2.4G mode	2.4G mode
Fn+5	Wired mode	Wired mode

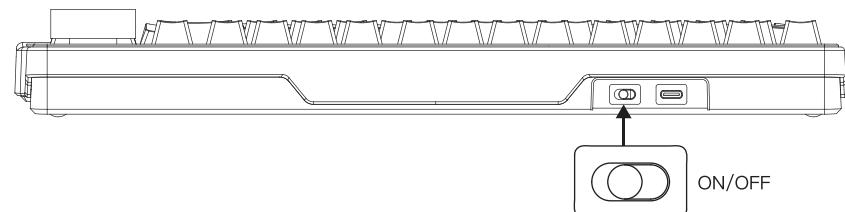

Wired mode:

Connect the Type C data cable, then press FN+5 to enter the wired mode, (Note: after switching the Bluetooth/2.4G mode or unplugging the data cable, you must press FN+5 again to enter the wired mode)

Bluetooth mode:

Toggle switch to the right after toggling the keyboard on, first press the FN+1/2/3 key combination to select the corresponding Bluetooth channel, and then long press the FN+1/2/3 key combination 3S to enter the pairing mode, the keyboard enters the pairing code state, blue indicator light flashing, connected to the device light is always on, can not find the pairing device 120s later, exit the pairing code mode light off, the keyboard goes to sleep.

2.4G mode:

Toggle switch to the right after toggling the keyboard on, and then press the FN + 4 key combination 3S into the pairing mode, insert the receiver, the white light flashing, pairing successful exit pairing code, the mode light is always on, can not find the pairing device 30s later, exit pairing mode light off, the keyboard into sleep.