

DS18®



OWNER'S MANUAL
MANUAL DE USUARIO

PRO-TWN3

2.5" SUPER BULLET
TWEETER WITH 1" VOICE COIL
AND NEODYMIUM MAGNET

*SUPER TWEETER BALA DE 2.5" CON
MAGNETO DE NEODIMIO Y BOBINA
DE VOZ DE TITANIO DE 1"*


4Ω

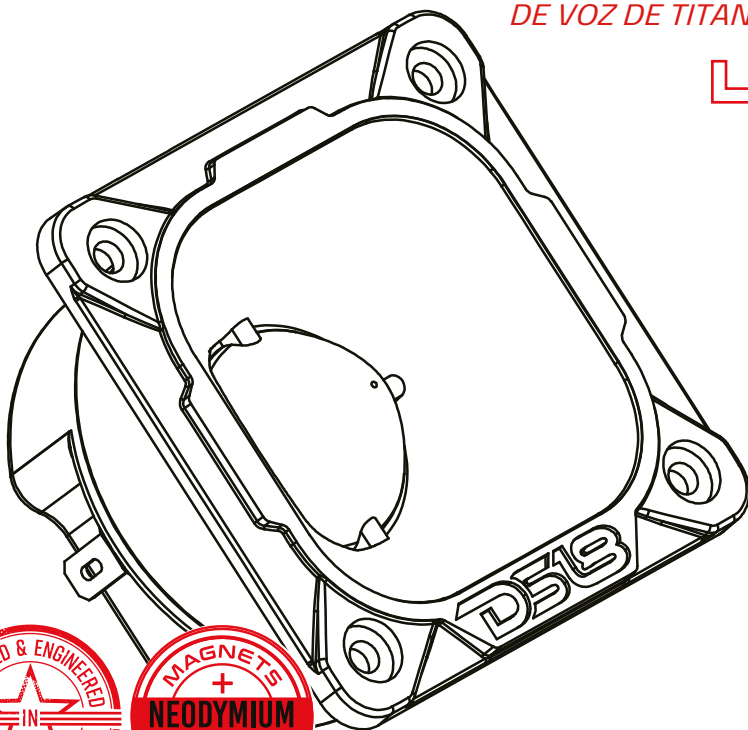


ENGLISH | ESPAÑOL



PRO-TWN3

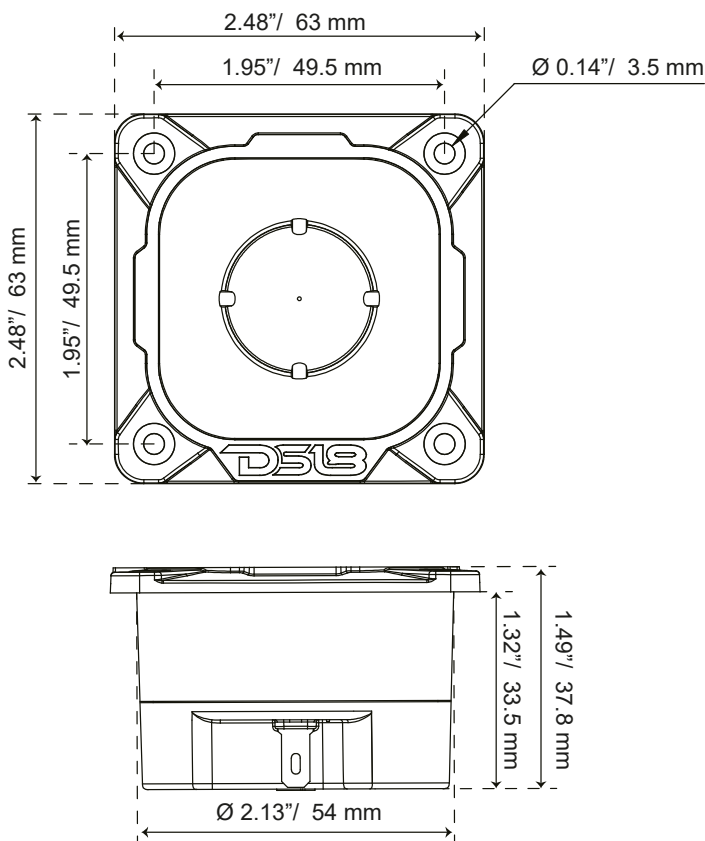

SPL vs Freq

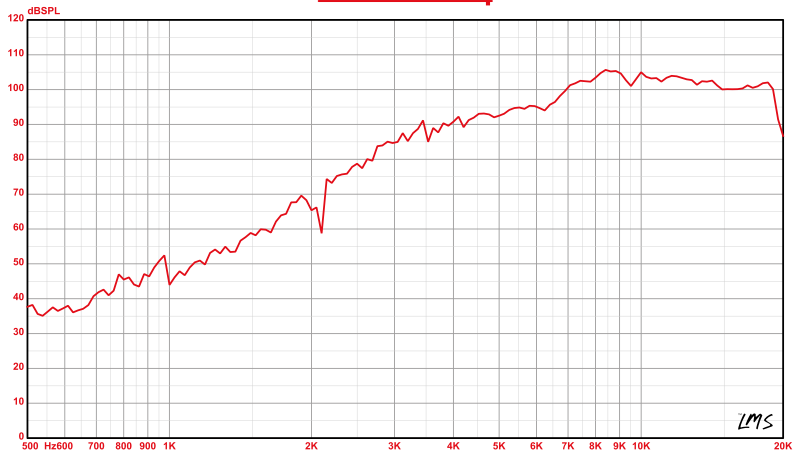



SPECIFICATIONS / ESPECIFICACIONES:

Nominal Diameter / <i>Diámetro Nominal</i>	2.5" / 63 mm
Nominal Impedance / <i>Impedancia Nominal</i>	4 OHMS
AES Power Handling / <i>Manejo de Potencia AES</i>	50W
Program Power Handling / <i>Manejo de Potencia del Programa</i>	100W
Peak Power Handling / <i>Manejo de Potencia Máxima</i>	200W
Sensitivity (1w/1m) / <i>Sensibilidad (1w / 1m)</i>	107 dB
Frequency Response / <i>Frecuencia de Respuesta</i>	1.6 KHz - 20 KHz
Recommended Hi Pass Crossover / <i>Corte Paso Alto recomendado</i>	2 KHz
Pair or Single / <i>Par o Individual</i>	Single / Individual
Filter Included / <i>Filtro Incluido</i>	Yes 2.2 uf/ Si 2.2 uf

MOTOR / MOTOR:

Voice Coil Diameter / <i>Diámetro de la Bobina de Voz</i>	1"/25.4mm
Voice Coil Former Material / <i>Material Interior de Bobina de voz</i>	Kapton / Kapton
Winding Material / <i>Material de Bobinado</i>	CCAW / CCAW
Diaphragm Material / <i>Material del Diafragma</i>	PEN / PEN
Magnet Material / <i>Material del Imán</i>	Neodymium / Neodimio
Magnet Weight / <i>Peso del Iman</i>	0.57 oz
Body Material / <i>Material de la Carcasa</i>	PC / PC

MEASUREMENTS / MEDIDAS:

Overall Diameter / <i>Diámetro Total</i>	2.48 X 2.48" / 63 x 63 mm
Overall Depth / <i>Profundidad Total</i>	1.49" / 32.8 mm
Front Mount Baffle Cutout / <i>Corte del Orificio de Montaje</i>	2.12" / 54 mm
Mounting Depth / <i>Profundidad de Montaje</i>	1.32" / 33.5 mm

WE LIKE IT LOUD



FOR MORE INFORMATION
PLEASE VISIT
DS18.COM

WE LIKE IT LOUD



DS18®