


Aqara

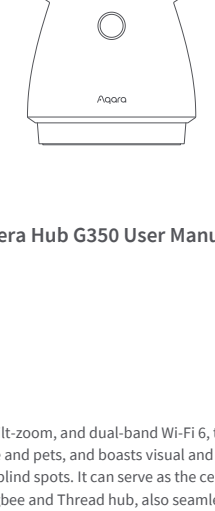

Camera Hub G350 User Manual **EN**


Product Introduction

Powered by dual lenses and pan-tilt-zoom, and dual-band Wi-Fi 6, the Camera Hub G350 captures ultra-clear 4K detail, tracks people and pets, and boasts visual and sound detection—covering both close-ups and wide areas with no blind spots. It can serve as the central node in your smart home, acting as Matter controller and Zigbee and Thread hub, also seamlessly integrating with popular smart home platforms such as Apple Home (including HomeKit Secure Video), Google Home, and Amazon Alexa.


What is in the Box



Camera Hub G350 × 1




Power cable × 1




User manual × 2


Front view

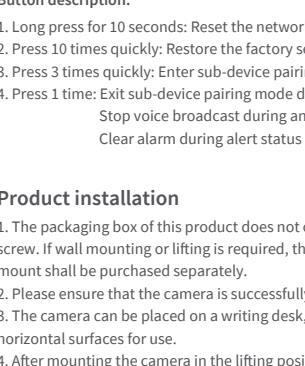

PT and microSD card slot

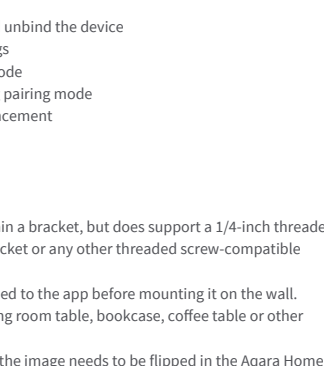

Rear view of the product

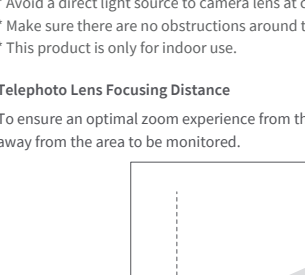

- 1 Illumination Sensor
- 2 Microphone
- 3 Telephoto Lens
- 4 Wide-Angle Lens
- 5 Function Button
- 6 Status Indicator
- 7 MicroSD Card Slot
- 8 Vertical PT Mechanism
- 9 Horizontal PT Mechanism
- 10 Type-C Power Port
- 11 Speaker

Button description:

- 1. Long press for 10 seconds: Reset the network and unbind the device
- 2. Press 10 times quickly: Restore the factory settings
- 3. Press 3 times quickly: Enter sub-device pairing mode
- 4. Press 1 time: Exit sub-device pairing mode during pairing mode

- Stop voice broadcast during announcement
- Clear alarm during alert status

Product installation

- 1. The packaging box of this product does not contain a bracket, but does support a 1/4-inch threaded screw. If wall mounting or lifting is required, the bracket or any other threaded screw-compatible mount shall be purchased separately.
- 2. Please ensure that the camera is successfully added to the app before mounting it on the wall.
- 3. The camera can be placed on a writing desk, dining room table, bookcase, coffee table or other horizontal surfaces for use.
- 4. After mounting the camera in the lifting position, the image needs to be flipped in the Aqara Home app to be viewed normally.

* The camera should be placed within the range of wireless Wi-Fi signal coverage.

* Do not place it near a strong electromagnetic interference source.


* Avoid a direct light source to camera lens at close range.

* Make sure there are no obstructions around the device.

* This product is only for indoor use.


Telephoto Lens Focusing Distance

To ensure an optimal zoom experience from the telephoto lens, place the camera at least 10 ft (3 m) away from the area to be monitored.

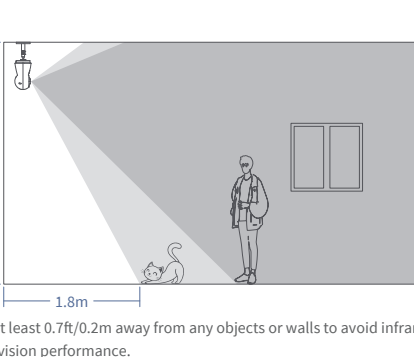


*The camera can be placed on a table or shelf, or can be installed on a wall or ceiling. Select a location and height that achieves your desired view and is within reach of a power outlet.


On a Table or Shelf

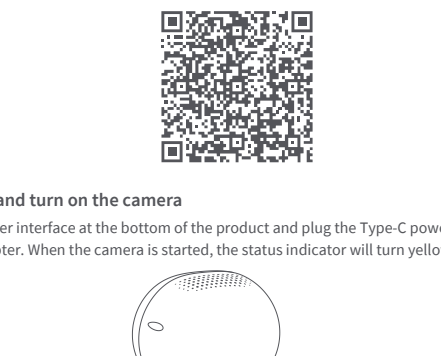

On the Wall

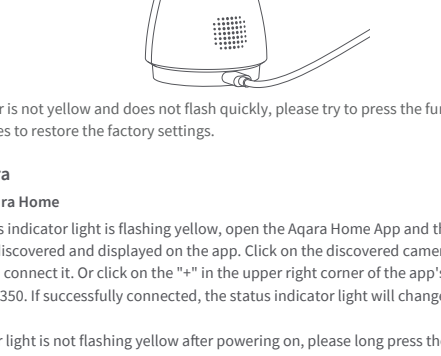

On the Ceiling

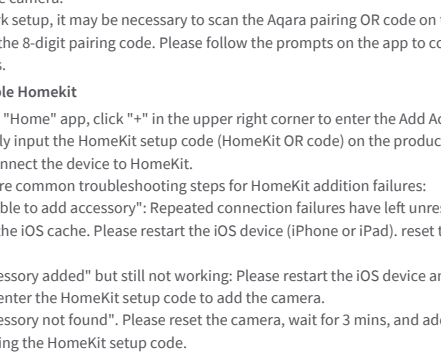


*Keep the camera at least 0.7ft/0.2m away from any objects or walls to avoid infrared reflection, which may impact night vision performance.

The above diagram shows the installation methods. In case of using a bracket/mount purchased separately, please refer to its installation guide.

Device Binding & Initialization


1. Download App

Search for "Aqara Home" in the Apple App Store, Google Play, or scan the following QR code to download the Aqara Home app.



2. Power up and turn on the camera

Locate the power interface at the bottom of the product and plug the Type-C power cord to connect the power adapter. When the camera is started, the status indicator will turn yellow and flash quickly.

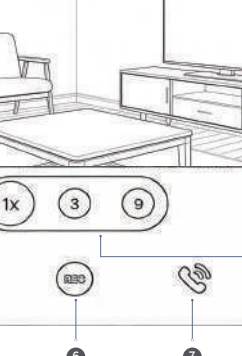

* If the indicator is not yellow and does not flash quickly, please try to press the function button rapidly 10 times to restore the factory settings.

3. Add camera

Connect to Aqara Home

When the status indicator light is flashing yellow, open the Aqara Home App and the camera should be automatically discovered and displayed on the app. Click on the discovered camera and follow the app prompts to connect it. Or click on the "+" in the upper right corner of the app's homepage, select "Camera Hub G350." If successfully connected, the status indicator will change to a solid blue light.

• If the indicator light is not flashing yellow after powering on, please long press the function button for 10 seconds or quickly press the function button 10 times to reset the device.

• During network setup, make sure that your mobile phone is connected to the Wi-Fi network in the same LAN as the camera.

• During network setup, it may be necessary to scan the Aqara pairing OR code on the product, manual cover, or enter the 8-digit pairing code. Please follow the prompts on the app to complete the necessary steps.

Connect to Apple HomeKit

Open the Apple "Home" app, click "+" in the upper right corner to enter the Add Accessories page, scan or manually input the HomeKit setup code (HomeKit OR code) on the product or the user manual, and connect the device to HomeKit.

The following are common troubleshooting steps for HomeKit addition failures:

1. Prompt "Unable to add accessory": Repeated connection failures have left unresolved error information in the iOS cache. Please restart the iOS device (iPhone or iPad), reset the camera and try again.

2. Prompt "Accessory added" but still not working: Please restart the iOS device and reset the camera, then manually enter the HomeKit setup code to add the camera.

3. Prompt "Accessory not found": Please reset the camera, wait for 3 mins, and add it again by manually entering the HomeKit setup code.

Note: Please do not throw away the OR code on the product or User Manual. If unable to add device, please press and hold the function button for 10s to reset the network, and then try again.

Bind child Device

This product is a Zigbee hub, and also can connect with Thread child devices, please bind child devices according to the child device's user manual.


Other Functions

For more device functions, please log in to the Aqara Home app to explore.

Description of Indicator Lights

Indicator Light Status	Device Status
Solid Yellow Light	Starting Up
Flashing Yellow Light	Waiting to Connect
Flashing Blue Light	Network Connecting
Slow Flashing Blue Light	Connection Successful and Account Binding
Solid Blue Light	Functioning Normally
Solid white Light	On for 10 mins With No Network Configured
Flashing Purple Light	Allows Adding Child Devices
Slow Flashing Yellow Light	Firmware Upgrading
Light off	Indicator Light Turned Off/Power off/Sleep Mode

App Function Introduction

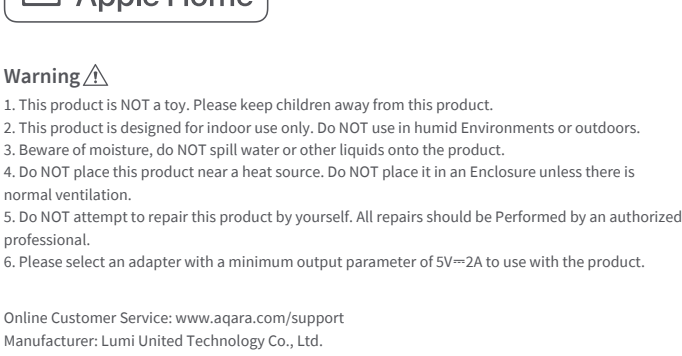

- 1 Back: Tap to exit the current page
- 2 Device Name: Tap to enter the device settings page
- 3 Settings: Tap to enter the device settings page
- 4 Sleep: Tap to put the device into sleep mode (privacy mode)
- 5 Screenshot: Capture the current live view
- 6 Record: Tap to capture the current live video
- 7 Call: Tap to initiate a call with the camera
- 8 Pause: Pause the current live video
- 9 Full screen: Tap to enter full screen
- 10 Mute: Tap to mute the live stream
- 11 Floating window: Tap for pop-out playback
- 12 Quality: Tap to switch
- 13 Zoom Selection: After enabling, click or draw a box on the screen, and the camera will automatically point to that area and zoom in
- 14 Zoom Shortcut: Click or slide to adjust the zoom level

- PTZ Calibration: Click to automatically calibrate the PTZ position once.
- PTZ Control: Click to control the direction of the PTZ.
- Preset Angles: Modify or set camera preset positions.
- Pan-Tilt: Click to turn PTZ-related functions on/off.
- Integrated Events: The camera can link with other Aqara smart devices. When these devices trigger an event, the camera will start recording and the video can be played back.
- Albums: Access screenshots and videos captured by the camera.
- Cruise: Set and activate the cruise function. The camera will automatically rotate to preset positions in sequence.
- Panoramic Viewfinder: Set and activate panoramic positioning. Tap on the panoramic map to make the device point to the corresponding location.
- Person Tracking: When enabled, the PTZ will automatically track a detected human shape.
- Animal Tracking: When enabled, the device will track detected animals.
- Close-Up Tracking: When enabled, the device will track and zoom in on detected humans, cats, or dogs.
- Home Live view: Click to enter the live view interface of all cameras.
- Video Event History: Click to access the recorded event videos from all cameras.
- Live View: The live view interface of the current device.
- Playback: The playback interface for the current device.
- AI Video Search: Click to enter the smart video search interface.
- AI Features: The control interface for the camera's intelligent algorithms.

Specifications

Camera Hub G350

Model: CH-C14E/ CH-C14D

Wide-Angle Lens Video Resolution: 3840×2160

Wide-Angle Lens Angle: 133°(diagonal)

Wide-Angle Lens Focal Length: 2.8 mm

Telephoto Lens Video Resolution: 2560×1440

Telephoto Lens Angle: 43°(diagonal)

Telephoto Lens Focal Length: 8 mm

Aperture: f/1.6

Frame Rate: 20 fps

Aspect Ratio: 16:9

Video Codec: H.264

Wireless Protocols: Wi-Fi IEEE 802.11 b/g/n/ac/ax 2.4/5 GHz, Zigbee/Thread IEEE 802.15.4, Bluetooth

Power Input: 5V=2A

Local Storage: MicroSD card (not included). CLASS 10 or above is supported, up to 512GB storage.

Operating Temperature: -10°C~40°C (14°F~ 104°F)

Operating Humidity: 0~95% RH, no condensation

Dimensions: 124×85×65mm (4.88×3.35×2.56in)

User Information

Use of the Works with Apple badge means that an accessory has been designed to work specifically with the technology identified in the badge and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.

A 10-day recording history from your Camera Hub G350 is securely stored in iCloud and available to view in the Apple Home app on your iPhone, iPad, or Mac. You can add one camera to a 50GB plan, up to five cameras to a 200GB plan, or up to an unlimited number of cameras to a 2TB plan at no additional cost. Camera recordings don't count against your iCloud storage limit.

Communication between iPhone, iPad, Apple Watch, HomePod, HomePod mini, or Mac and the HomeKit-enabled Camera Hub G350 is secured by HomeKit technology.

Apple, Apple Watch, HomeKit, HomePod, HomePod mini, Siri, iPad, iPad Air, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries.

Warning **⚠**

- 1. This product is NOT a toy. Please keep children away from this product.
- 2. This product is designed for indoor use only. Do NOT use in humid environments or outdoors.
- 3. Beware of moisture, do NOT spill water or other liquids onto the product.
- 4. Do NOT place this product near a heat source. Do NOT place it in an enclosure unless there is normal ventilation.
- 5. Do NOT attempt to repair this product by yourself. All repairs should be performed by an authorized professional.
- 6. Please select an adapter with a minimum output parameter of 5V=2A to use with the product.

Online Customer Service: www.aqara.com/support
Manufacturer: Lumi United Technology Co., Ltd.
Address: Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District, Shenzhen, China.
Email: support@aqara.com
Made in China