
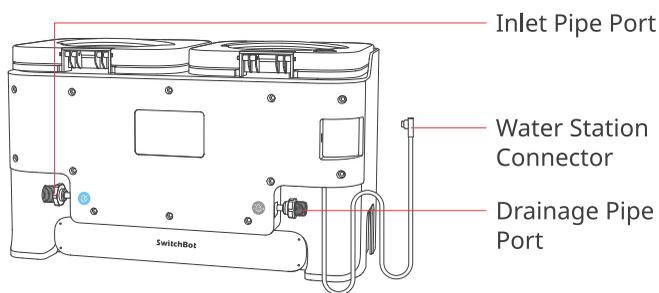


SwitchBot External Water Tank Assembly

User's Guide


Components

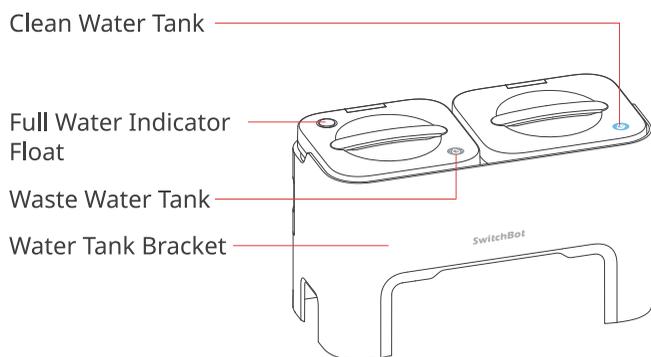


Please note: This product can only be used with SwitchBot Floor Cleaning S10 Water Station.

Installation

- 1 Mount the External Water Tank Assembly onto your Water Station, as shown.

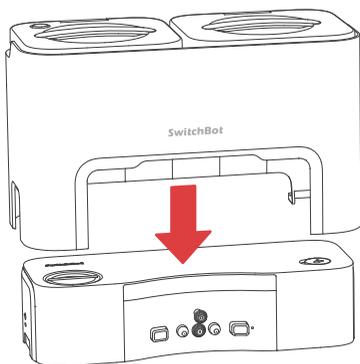


- 2 Remove the G 1/2" and G 3/8" connectors on the back of your External Water Tank Assembly.
*Press the indicated ring while pulling the connector.

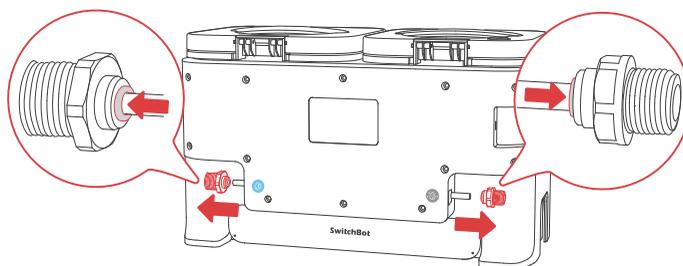


- 3 Connect the G 1/2" and G 3/8" connectors to the water inlet pipe and drainage pipe of your Water Station.


*Make sure the Rubber Gaskets are properly installed to prevent water leakage.

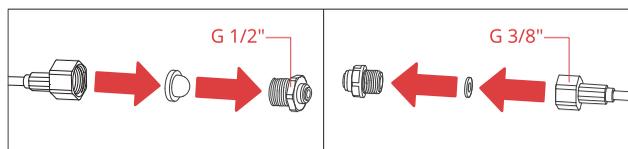


- 4 Plug the two connectors back to ports on External Water Tank Assembly, make sure they are installed on the correct ports.

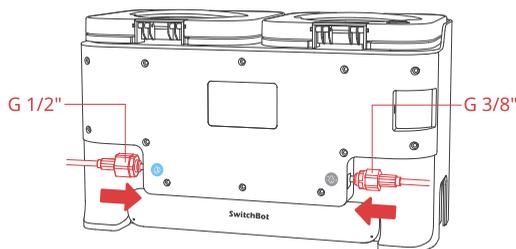

- 5 Insert the Water Station Connector on the Type-C port on your Water Station.

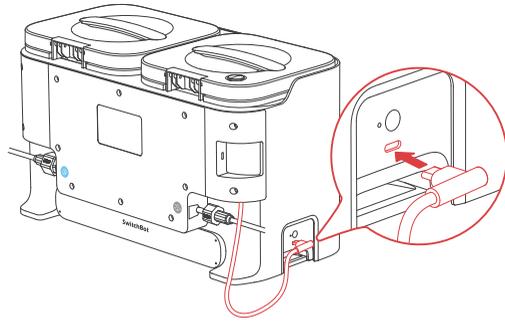

- 6 Move the assembled Water Station to a suitable position and place it against a wall.

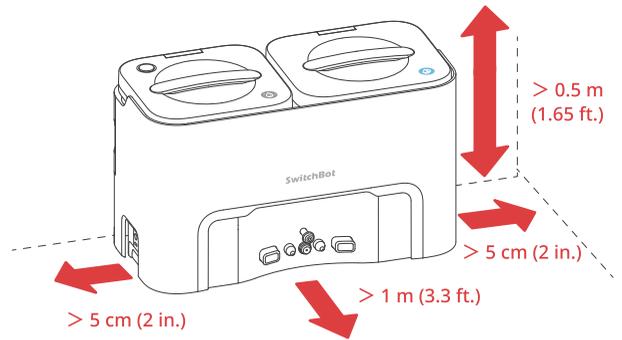


- 7 Take out the Clean Water Tank and inject water to the highest water level.




Please note:  Hot water is not recommended because it may cause device damage.

- 8 Our app will prompt you when your Clean Water Tank is out of water or Waste Water Tank is full. You can also check waste water level by observing the full water indicator float on your Waste Water Tank.

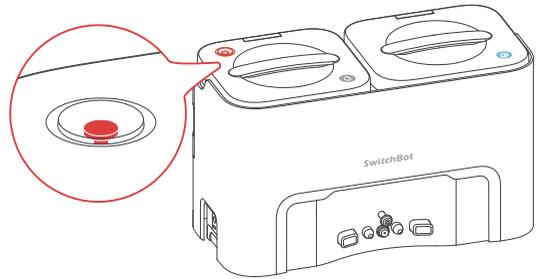


Waste Water Tank Maintenance

- 1 Take out the Waste Water Tank, open the upper cover and empty it.

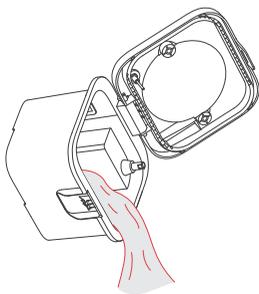

- 2 Rinse the tank with water.

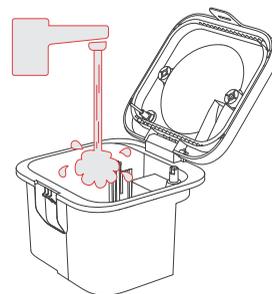

Please note:

1. The full water indicator float is movable. Please clean the tank gently.
2. Do not add hot water as it may deform the Clean/Waste Water Tank.
3. If there is residual on the tank body, wipe it off with a dry, soft cloth before reinstalling.