


USER MANUAL
L2 PAN-TILT
LIGHT BULB CAMERA

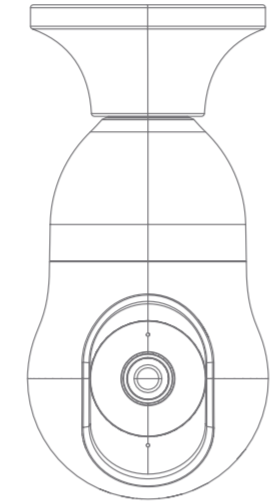

PRODUCT WARRANTY CARD

Your LaView product is by a 1-year warranty from the purchase date. For more information on repairs, exchanges, and other policies, please visit www.laviewusa.com.

Please send all inquiries through the Contact Form on our website, or email us at info@laviewusa.com. And our technicians would be glad to assist you.

CATALOGUE

- 001: WHAT'S IN THE BOX
- 003: APP-SET UP
- 006: INSTALLATION
- 007: TROUBLESHOOTING
- 008: MOTION DETECTION
- 009: OTHERS
- 011: FCC COMPLIANCE
- 012: CUSTOMER SERVICE
- 013: PARAMETER

Back cover: PRODUCT WARRANTY CARD

PARAMETER

Camera	
IR Distance	33ft
Lens	4mm
Day & Night	IR Cut Filter with Auto Switch
Processor	High-Performance Embedded SOC Processor
Wireless	Built-in 2.4GHz Wi-Fi
Audio	Built-in Omnidirectional microphone
Output	Built-in Loudspeaker
Resolution	
Compression Standard	H.265
Max Resolution	2560*1440
Frame Rate	1-25fps adaptive frame rate of network transmission
WiFi	IEEE802.11n
Cloud Storage	LaView Cloud Storage
Local Storage	Micro SD Card (Max. 128G)
PIR	PIR Motion Sensor
Operating Conditions	14°F - 122 °F (-10°C - 50°C) Humidity 95% or Less Non-condensing
Power Supply	AC 110V-240V
Power Consumption	Max. 8W

CUSTOMER SERVICE



LIVE CHAT:
In LaView APP or on laviewusa.com

Email: info@laviewusa.com
Our professional technicians are committed to reply all your requests within 24 hours

If you purchased from Amazon, you can also contact our professional customer service team in your Amazon account.

WHAT'S IN THE BOX

- 1.2
- Bulb Base
- Smart
- User Manual
- Quick Start Guide

FCC COMPLIANCE

PLEASE CONSULT THIS CHECKLIST FOR ALL PARTS.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications or changes to this equipment. Such modifications or changes could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If the equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RESET

Press and hold the reset button for 5 seconds to reset the device (Camera will return to factory default settings followed by a welcome ringtone.) Wait until the camera is beeping every 15 seconds which means the camera is ready for pairing. If the camera is not beeping, reset the camera again.

AP MODE



After reset, press the reset button for one time to get the camera into AP mode. Then change QR Code to AP Mode in LaView APP.

APP SET UP

For step-by-step Mobile APP set up instruction, please read the Quick Start Guide included in the package or check out our YouTube tutorials.

DOWNLOAD AND INSTALL APP

- LaView APP is available for both iOS and Android OS. Search the name "LaView" in APP Store or Google Play (The other LaView apps, such as LaView Connect, LaView ONE, LaView Life do NOT support L2 camera.)
- Waterproof and outdoor use
- For more technical questions or tutorials such as Alexa setup, Cloud Storage setting, please follow in-APP tutorial section in the LaView APP or visit our YouTube tutorials.
- We proudly offer a 1-year warranty on all of our products. This warranty extends to the original purchaser only and is non-transferable.
- If you wish to return a product within the return period, please message us directly in your Amazon account or on our website.
- If you have any question about the product, please feel free to contact us: info@laviewusa.com

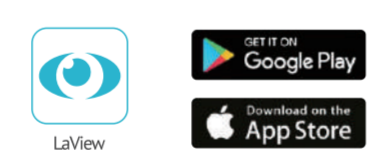MAKE SURE YOUR PHONE IS CONNECTED TO A 2.4GHZ WI-FI NETWORK

COMPLETE THE APP REGISTRATION PROCESS

FOLLOW THE IN-APP INSTRUCTION TO PAIR THE CAMERA

Click on the "+" sign to add the camera. Continue to click "Video Surveillance" > "Smart Camera"

Connect the camera to power via included bulb base (If you are not setting up the camera for the very first time, press the Reset button instead for 5 seconds until you hear a beep.)

OTHERS

WHAT CAN I DO IF THE IMAGE IS NOT CLEAR?

The camera is equipped with 3K Full HD lens and sensor to produce superior image; however the image quality may be affected by the lighting condition

- Ensure the camera is NOT facing to environment with poor lighting condition or with extreme high contrast. Ensure it is NOT facing directly to bright lighting source such as sun light.
- Ensure your phone and your router has enough bandwidth to stream HD video. A minimum of 2Mbps is required to stream each 2K camera. If the network does not meet this requirement, the live-view stream will be downgraded to SD automatically.


NIGHT VISION

The camera is equipped with Infrared LED technology to capture black and white night vision image in detail at night. However, the night vision image quality may be affected by the following factor:

- There are high contrast light sources such as car headlight pointing to the camera

MOTION DETECTION

Use the camera to scan the QR code on the phone (Keep the camera 6-8 inches away from the phone)



Press "I" heard a Prompt after the camera receives the QR code and beeps. The camera will start pairing

When connecting, you should make sure your router, mobile phone, and camera are as close as possible

Wait until the camera is connected online

Customize the camera name to differentiate cameras in different locations and finish pairing process

If the pairing is not successful, press the Reset button for 5 seconds until you hear a beep and start again. Or check the FAQ section for more troubleshooting steps

Check if Wi-Fi settings is changed. If so, please reset the camera

Ensure the router is powered on and online

Ensure the camera is powered on

Ensure the router has decent network bandwidth

Check the app is on the latest version

HOW TO TURN ON AND OFF MOTION DETECTION?

To turn on or off motion detection and Human detection settings, go to the camera menu and click on Detection Alarm Settings

WHAT CAN I DO IF I CANNOT RECEIVE NOTIFICATIONS?


- Ensure your phone notification setting is enabled for LaView APP
- Ensure the phone has decent network
- Ensure the camera is online

WHAT CAN I DO IF I RECEIVE TOO MANY NOTIFICATIONS?


If the camera is placed at a location with heavy traffic, we recommend you relocate it to a place with less traffic to receive fewer alerts

INSTALLATION

SCREEN THE CAMERA INTO THE BULB BASE IN THE DIRECTION OF THE ARROW

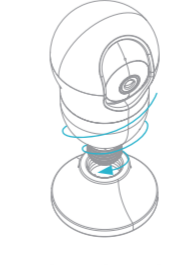

MOUNT THE CAMERA TO THE CEILING

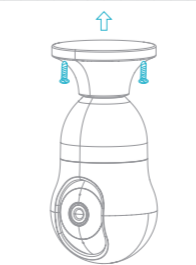

TROUBLESHOOTING

IF YOU CANNOT CONNECT THE CAMERA TO THE INTERNET, CHECK THE FOLLOWING STEPS

- Ensure you are connecting to a 2.4GHz Wi-Fi not 5GHz
- Ensure Wi-Fi password or SSID is correct
- Ensure the camera is placed as close to the router as possible
- Ensure the camera is powered on and is beeping twice every 15 seconds before scanning the QR code
- Ensure you are using the correct APP (LaView)
- Ensure the camera is scanning the QR code on the phone in the correct way
- If the above doesn't help, reset the camera and start pairing again

WHAT CAN I DO IF THE CAMERA STOPPED WORKING?

- Close and restart the APP