


Wireless Earbuds T3

English -----01

Operating Manual

1. Product Overview

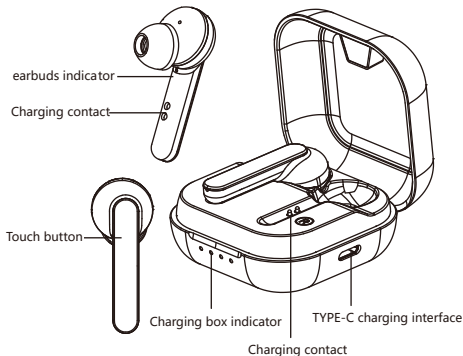

Packing list:

- A. TWS Bluetooth earbuds 1 pair (1 charging case)
- B. earbud caps (large, medium, small) 1 set each
- C. Type-C charging cable 1 piece
- D. Operation instructions 1 copy


2. Basic Features

Button	Function	Operation method
Touch button	On	User may turn on the earbuds after opening the charging case * When there is a pairing record, the earbuds will be re-connected to the device to which it is connected last time after being picked up from the charging case and turned on. If the reconnection fails, it will enter the Bluetooth pairing mode
	Off	In the "On" state, user may turn off the earbuds after putting it into charging case and closing the cover
	Play/Pause	User can play / pause music after turning on the music player and clicking the touch button on the left or right ear
	Previous	In the process of playing music, user may switch to the previous track after double-clicking the "touch button" on the left ear
	Next	In the process of playing music, user may switch to the next track after double-clicking the "touch button" on the right ear
	Answer	In the connected mode, user may answer the call after clicking "touch button" (either "touch button" on the left or right ear)
	Hang up	During call, user may hang up after clicking "touch button" (either "touch button" on the left or right ear)
	Reject	When there is an incoming call, double-click the "Touch key" (on either left earbud or right earbud) to reject the call

	Wake-on-voice	In standby or music mode, user may start voice assistant (either “touch button” on the left or right ear) by pressing and holding “touch button” for 2-3 seconds and releasing after hearing the “beep” sound. * Require mobile phone support.
--	---------------	--

3. Bluetooth Pairing and Connection

- A. During the first connection, the earbuds will automatically power on and pair after T3 charging case is opened, and the main ear will automatically enter the Bluetooth pairing mode in case TWS pairing is completed successfully after 5S.
- B. Turn on the mobile phone and Bluetooth, search for Bluetooth devices, search for “Willful T3” and click “Willful T3” for pairing and connection; after successful connection, the mobile phone will display that “Willful T3” has been connected. At this time, user may listen to the music or call in the mobile phone through the Bluetooth earbuds.
- C. User may control the functions of answering, hanging up, previous track and next track through the touch button of Bluetooth earbuds.



4. Indicator

4.1. Bluetooth indicator of earbuds

Status	Tone
On	White indicator is on for 3 seconds
Off	No LED indicator
dual-pairing mode?	White indicator is flashing quickly
Bluetooth pairing state	Main earbud: white indicator flashes once every 3 seconds
	Auxiliary earbud: white indicator flashes once every 10 seconds
Clear pairing record	White indicator is on for 2 seconds
Connected and standby state	Main record: white indicator flashes once every 10 seconds
	Auxiliary record: white indicator flashes once every 10 seconds
Charging	No indicator on earbuds (the indicator of charging case is on according to the dump energy)
Low battery alarm	White indicator flashes once every 2 seconds

4.2. dump energy indicator of charging case

Status	Indicator
When the residual power is 0% - 25%	The first white indicator is on
When the residual power is 25% - 50%	The first and second white indicators are on
When the residual power is 50% - 75%	The first, second and third white indicators are on
When the residual power is 75% - 100%	The four white indicators are on

4.3. Charging indicator of charging case

Status	Indicator
Charging with the power of 0% - 25%	The first while indicator is slowly flashing
Charging with the power of 25% - 50%	The first white is on and the second white indicator is slowly flashing
Charging with the power of 50% - 75%	The first white indicator is on, the second white indicator is on and the third white
Charging with the power of 75% - 99%	indicator is slowly flashing The first white indicator is on, the second
Fully charged	and third white indicators are on and the fourth white indicator is slowly flashing The four white indicators are on

5. TTS English Prompt Tone

Prompt tone	Power on	Power off	Pairing	connected	Disconnected	Battery_Low
-------------	----------	-----------	---------	-----------	--------------	-------------

6. Charging

In case of T3 low-power alarm, please immediately put the earbuds into the charging case to charge. The charging time is 2 hours. When the earbuds is being charged, the indicator of charging case will display the current power of the charging case. When the earbuds is fully charged, the indicator of the charging case will go out.

Charging connection

Please connect the Type-C joint of charging cable to the Type-C charging interface of charging case and USB joint to USB charger (car charger, travel charger, computer USB, etc.).

7. Product Specifications

Bluetooth specifications	Bluetooth 5.0
Frequency range	2.402-2.480GHz
Supporting protocol	HFP, HSP, AVRCP, A2DP
Chip Solution	AB1536U
Decoding method	SBC AAC
Range of application	Up to 10 meters
Battery capacity	Earbuds: 3.7V 40mAh / Charging case: 3.7V 420mAh
Net weight	46.6g (earbuds: 4.3g * 2; charging case: 38g)
Dimensions	Earbuds: 17.1 * 23.8 * 43.1mm Charging case: 53.5 * 53.5 * 28mm

8. Notes and Q & A

A. How to connect? What should I do if re-connection fails?

What should I do if only one earbuds is working normally?

After T3 is successfully connected to your mobile phone, it will automatically connect to your mobile phone every time you

turn it on. If re-connection failed or only one earbuds is working normally, you need to put the earbuds in the charging case, close its cover and keep for 5S, and then open the charging case for connection.

B. How to clear the pairing record?

After the earbuds is turned on, you may press the touch key for three times to clear the pairing history. After the pairing history is successfully cleared, the earbuds indicator will be on for 2S and then enter the left and right ear pairing state again. **(This function can only be used when the earbuds work abnormally that only a single earbud can be connected with. You need to disconnect the device when clearing the pairing.)**

C. What devices can I use to charge?

All car chargers, travel chargers and computer USBs with a DC voltage of 5V and current of 1A can be used to charge.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CE   RoHS  FCC ID: WSG-T3
 204-920440 Made In China