



Smart Cat Feeder F3 Wi-Fi

Dear users:

Thank you for purchasing Petwant Automatic cat feeder.
This User Guide is intended to provide your pets with a better life.

To have a better user experience,
please read all directions before using the product and retain this guide for reference.

Using environment: The feeder should be used indoors(-5°C to 40°C).

Meanwhile, please put the feeder in the shade.

Wireless requirement: Only 2.4G Wi-Fi.


The best distance between feeder and router is 2-6m (no partition).

Scan the QR code and follow our Facebook, through which you could get high-quality after-sales service.



Meet Your Smart Feeder

F3 Wi-Fi continue the minimalist design style, and have a more smooth operational process. In order to meet the habit of cats, we use the way of having more meals a day but less food at each. Users can set feeding schedules up to 6 and portions up to 8 independently ($5\pm2g$ per portion). To make sure of the safety of your pets, the feeder switch and adapter socket are specially designed at the bottom of the feeder. Press the food tray in the direction of the body to make the food tray pop up.

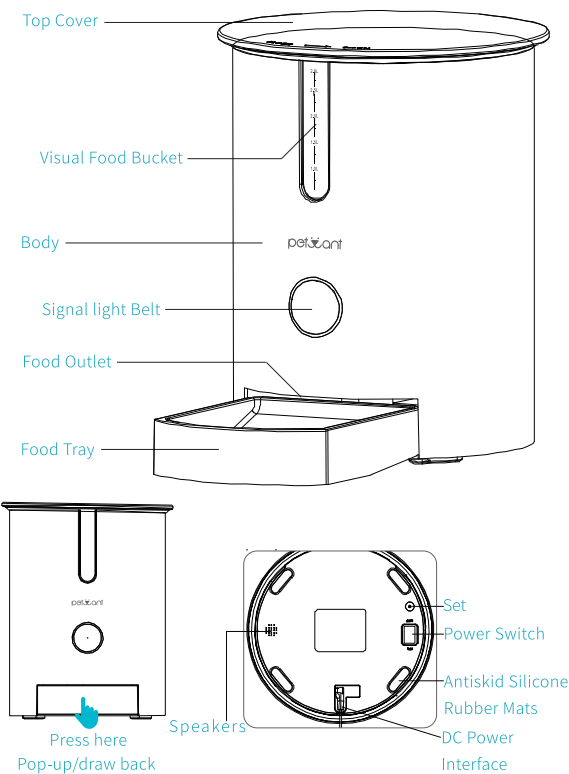

Download Petwant APP

To have a better experience of using your smart cat feeder.



Petwant

Method 1:

Petwant APP is available on the Apple APP Store and Google Play. You can search "Petwant" to download APP.

Method 2:


Scan the QR code to enter the download page to install APP according to the guidance.



Users should authorize permissions to network and location access when installing, or it will affect the normal operation of your feeder.

Select Region

Selecting the correct user country or region will help your feeder connect with the most suitable server. Attention please, it will affect the normal operation of your feeder if you select the inappropriate country or region. (Country and Regions are shown in alphabetical order)

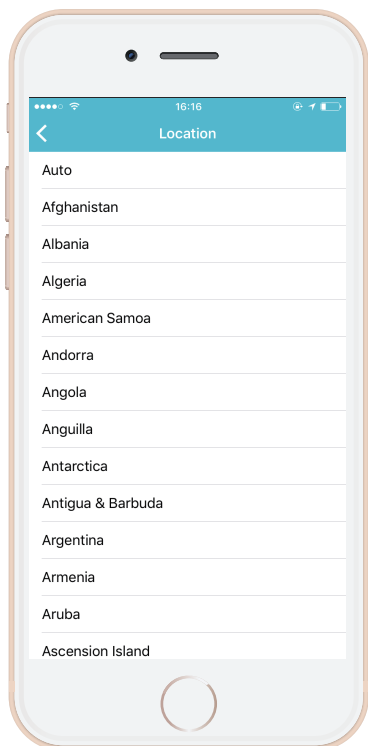


Create Your Petwant Account

Method 1:

Click "Sign up", then follow the directions on the Petwant APP to create your account.


Method 2:

Users can also log in through other ways, such as Twitter and Facebook authorized login.

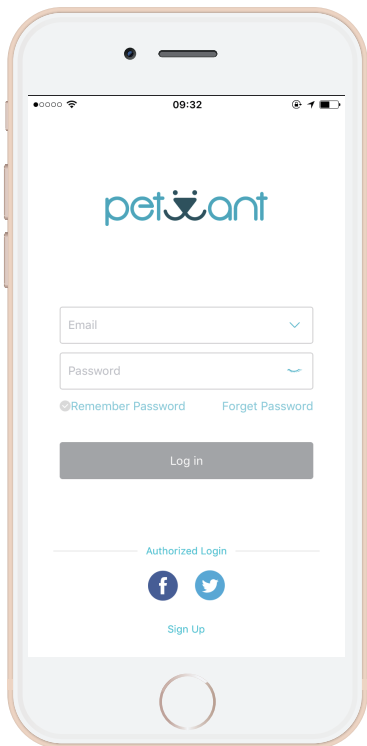

Preparations for Device Connection

Plug in and turn on the switch at the bottom of the feeder, then long press the "set" button until the signal light is quick flashing and users can connect feeder with Wi-Fi. Attention please: Only 2.4G WiFi environment is allowed to have a further setting.

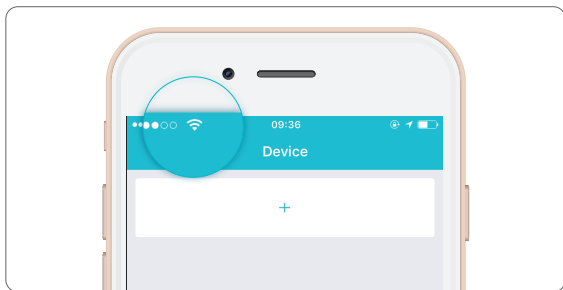

Normal:

The feeder is ready for configuration when the blue signal light is quick flashing.

The feeder is being configured when the blue signal light is slow flashing down.

The feeder is configured when the signal light is solid blue.



Abnormal:

If signal light is not flashing, please long-press the "set" button for 5s to reset it.

The feeder is power off or under no network environment when the blue signal light is off.


Add Device

Click "+" button to enter Devices interface. Then, click "Add New Devices" to enter "Select Device Model" interface. Select the right device model—F3 Wi-Fi.

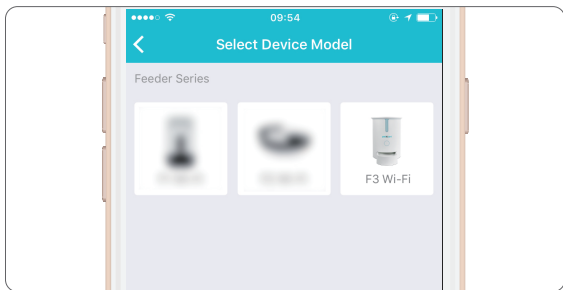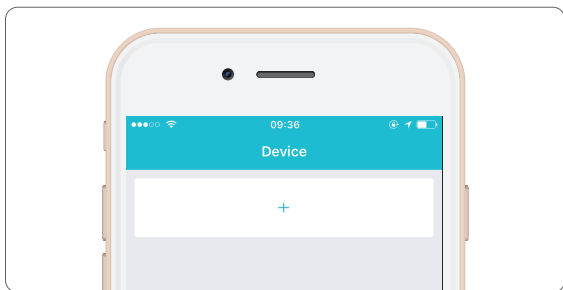



Add Device

Please make sure the signal light is quick flashing and then tick "Make sure that indicator belt is blinking" and click "Next" to enter "Device Connection" interface. Please use right Wi-Fi password to ensure pet feeder is working properly. It will last 10-20s for setting process which is affected by network environment. Please be patient.

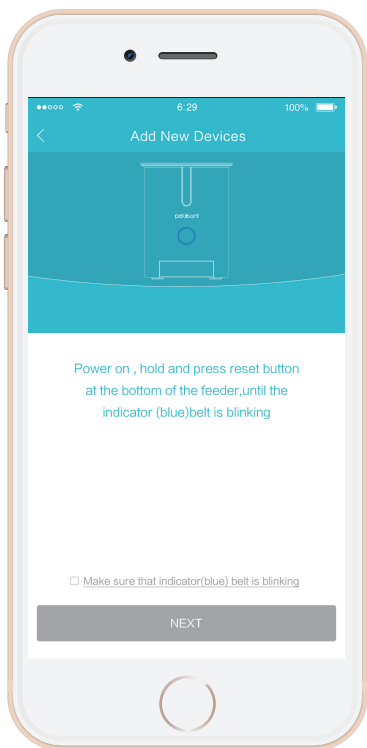

Input Serial Number Password

After completing the "Add Device" operation, you can find a configured device in "Nearby Devices" . Each feeder is equipped with an unique serial number to ensure your using process is safe and reliable(This serial number is different from the serial number in the bottom of body). Input the initial serial number and the password is 123456.

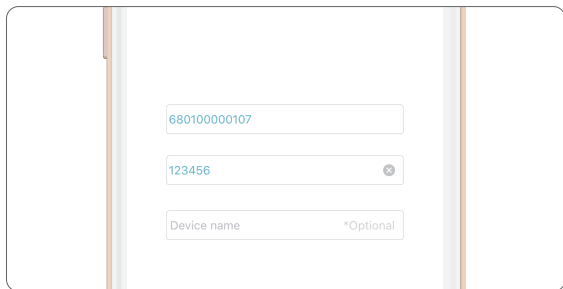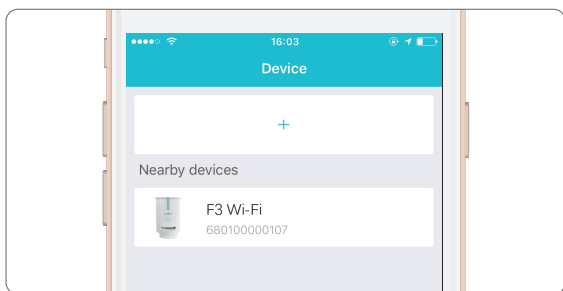


APP Homepage




Automatic Feeding Setting

Click "+" button to add feedings. In order to meet the habit of cats, users can set feeding schedules up to 6 and portions up to 8 independently ($5 \pm 2\text{g}$ per portion). Users can choose whether to open the feeding alarm and the notification of meals. If you want to delete meal setting, slide this setting to the left and click "Delete".

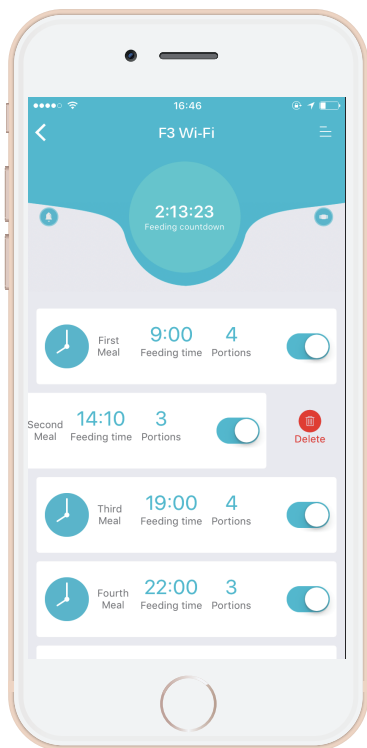


Manual Feeding

Long press Countdown for about 5s until Manual Feeding interface appears. Users can set portions independently to meet the habit of their pets. (up to 8 portions and $5\pm2g$ per portion)

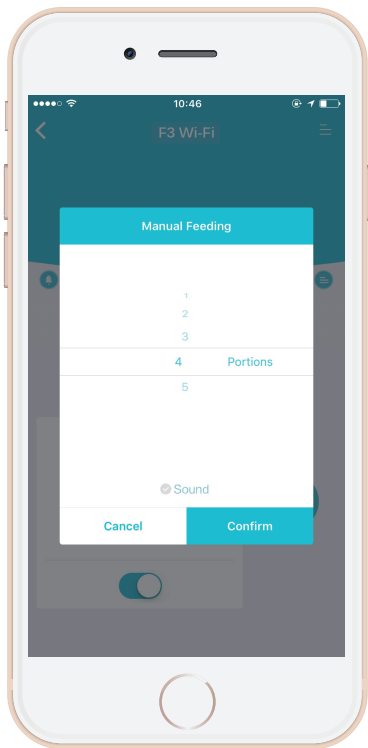


Device deletion and Information modification

If you want to unbind your device in application, find the right device and slide to the left and click "unbind".

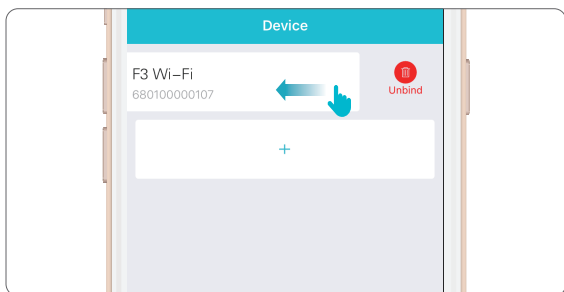


If you want to modify the device name or password, long press device icon and an interface will pop up for information modification.

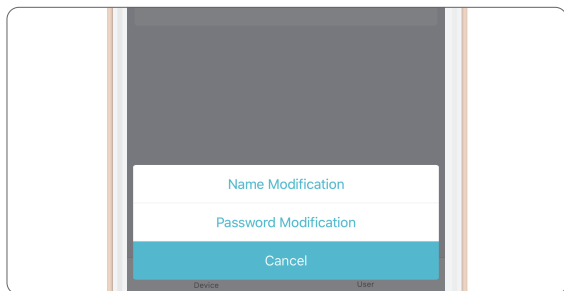


Add Configured Device

When you have ensured the device is connected with network successfully and it can work normally. Other users can input device serial number and password directly in "Add Configured Devices" to establish connections. (Attention please: Users can also operate to establish connections even far away from the feeder. Because the serial number is different from the number in the bottom of the feeder). The operations are as follows:

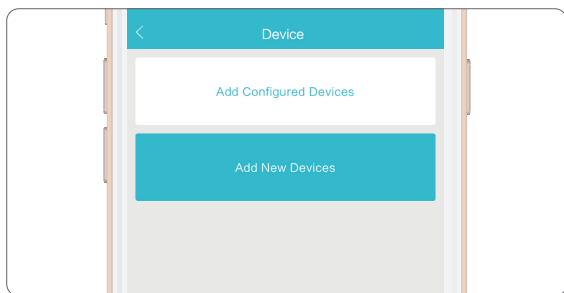


If there is nobody modifying the password, the password of the device is 123456. If the initial password has been modified, you need to input the password that you modified.

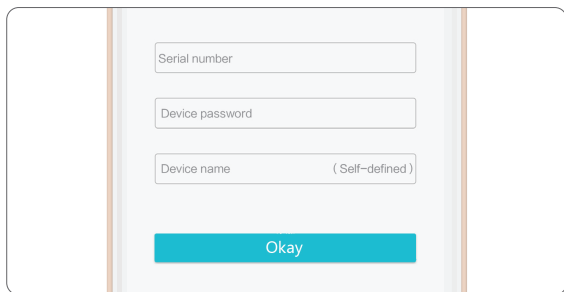A screenshot of a mobile application interface showing a form for adding a configured device. The form has three input fields: 'Serial number', 'Device password', and 'Device name (Self-defined)'. Below the form is a teal button with the text 'Okay' in white. The background of the screen is a light gray.


Other Setting

Password modification, location modification, feedback and asking for after-sales service can be all settled when you enter User interface. Users can not modify the password when users choose authorization login.

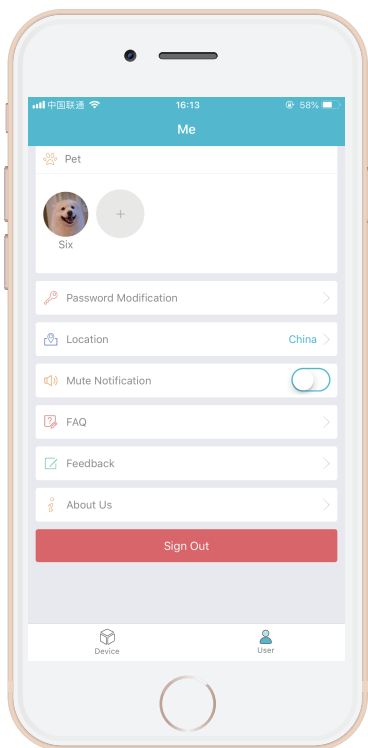


Add and Delete Pet's Information

Click "User" icon to enter "User Information" interface. Click " + " icon, then you can add pets' information.

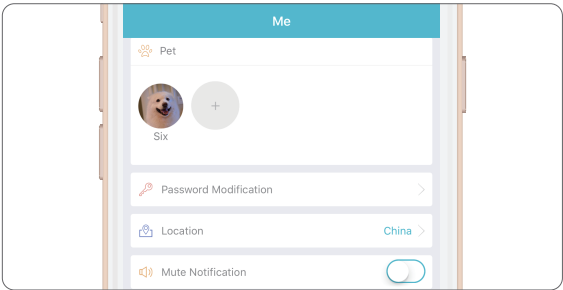


If you want to delete pet's information, just long press pet's avatar and an interface will pop up for information deletion. Click "Confirm" to delete selected information.

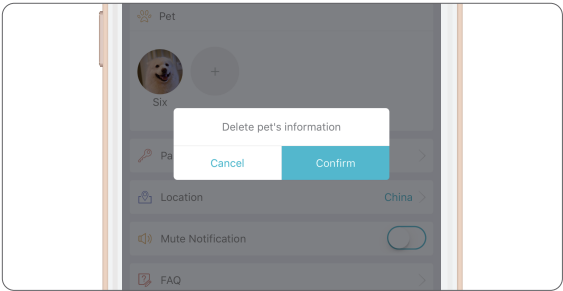

Assemble & Disassemble


Assemble & Disassemble food bucket:

Hold both sides of the Food Bucket and lift upwards for removal; The calibration direction of the food bucket needs to be aligned with the Slotting direction of main body and then press downward.

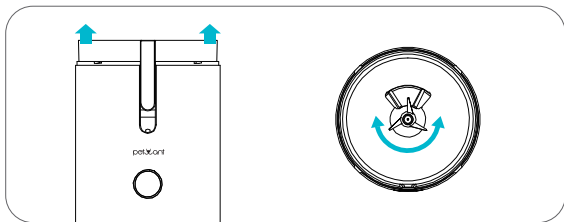

Assemble & Disassemble food tray:

Assemble food tray: Hold the feeder slightly backwards, and fit the tray into the buckle below, then push it towards the body.

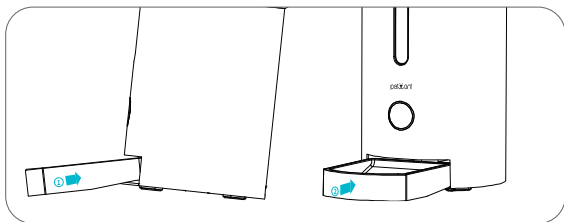

Cleaning Your Smart Feeder

1. Please cut off and unplug the device before cleaning.
 2. Clean the unit with a damp cloth rather than a soaked cloth.
 3. The food tray and tank can be removed for cleaning in the automatic dishwasher.
 4. The base can't be immersed in water at any time, or it may cause short-circuit of the device.
 5. It needs to be wiped clean and completely dry before refilling the food.
-

Important Safety Information

Explanation of Attention Words and Symbols used in this guide



This is the safety alert symbol. It is used to alert you to potential personal injury hazards.

Obey all safety messages that follow this symbol to avoid possible injury or death.



WARNING indicates a hazardous situation which if not avoided could result in death or serious injury.

CAUTION

CAUTION used without the safety alert symbol, indicates a hazardous situation which if not avoided could result in harm to your pets.

NOTICE

NOTICE is used to address safe use practices not related to personal injury.



- ★ Do NOT place any foreign object in the pet feeder.
 - ★ Do NOT use outdoors. FOR INDOOR HOUSEHOLD USE ONLY.
 - ★ Do NOT use an appliance for anything other than its intended use.
 - ★ Do NOT allow children to play or around pet feeder.
 - ★ Do NOT place anything on top of the pet feeder. The unit starts automatically.
 - ★ Do NOT disassemble the pet feeder other than components as instructed in this operating guide.
 - ★ Do NOT install or store pet feeder where it will be exposed to weather or temperatures below -20°C.
 - ★ Base should NOT be submerged in water at any time, as this may damage electronic components.
 - ★ Do NOT use this pet feeder with puppies or kittens. Dogs or cats not able to reach the food tray or with any physical disability.
 - ★ Do NOT operate any appliance if it has a damaged power cord or plug, or if malfunction or has been damaged. Call the Customer Care Center immediately for further instructions.
 - ★ Do NOT allow pets to chew on or swallow any parts. If you are concerned about the power cord, purchase a cord conduit (a hard plastic protector) in to protect the power cord.
 - ★ Do NOT attempt to repair the pet feeder by yourself.
-

Important Safety Information

- ★ If an extension cord is necessary, an extension cord with a proper rating should be used.
- ★ Do NOT use pet feeder for anything other than intended use. Using attachments not recommended or sold by the manufacturer may cause an unsafe condition.
- ★ Do NOT lift pet feeder by lid, hopper, bowl or bowl holder. Lift and carry feeder using both hands and hopper base, while keeping unit in upright position.
- ★ For dry food only. DO NOT use wet, canned or moist food.
- ★ To avoid tripping, always position power cord out of the way of foot traffic.
- ★ If the plug of this device gets wet, turn off the electricity to that wall outlet. Do not attempt to unplug.
- ★ Examine this appliance after installation. Do not plug in if there is water on the Power Cord or plug.
- ★ To reduce the risk of injury, close supervision is necessary when an appliance is used by or near children.
- ★ If using power cord, do not place power cord or plug in water or other liquids.
- ★ Dispose of all packaging materials properly. Some items may be packed in polybags; these bags could cause suffocation; keep away from children and pets.

CAUTION

- ★ Intended for small dogs or cats only.
- ★ Pet feeder should be placed on a level surface.
- ★ Always unplug any appliance when not in use, before putting on or taking off parts and before cleaning. Never pull on the electrical power cord to remove the plug from the wall outlet.

NOTICE

- ★ Read and observe all important notices listed on the pet feeder and in the packaging.
- ★ Attention: Rated voltage and rated current for Mico interface is 5V 1A. If the power supply does not meet the requirements, it may cause damage to the feeder.

SAVE THESE INSTRUCTIONS

Statement



FCC STATEMENT :

★ This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

★ This device may not cause harmful interference.

★ This device must accept any interference received, including interference that may cause undesired operation.



Declaration of Conformity

“Hereby, Shenzhen Petwant Pet Products Co., Ltd, declares that this F3 Wi-Fi is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

