

FAQS

How do I reset a light to factory settings ?

Turn the light off and on at the switch 5 times, about one switch every two seconds (not too fast). The lights will cycle through four colors or whites and stop on white when the reset has been successful. This is how you would remove a light from a network to then add it to a new one.

I've set up a new network / changed my password, how do I re-connect my lights ?

If you've changed your Wi-Fi password or set up a new router with a new password, you will need to reset your lights and connect them through the app as you did the first time you connected them. This is so you can assign the new, correct password for the security of each device.

Your Wi-Fi:

Router 802.11 b/g/n WPA2 security compatible

LIFX lights connect to your 2.4 Ghz Wi-Fi frequency network, which routers can be set up for. This offers better range and stability for devices. You may also have a 5 Ghz connection, so if you're not sure which is which, check the current Wi-Fi you're connected to by pressing the Wi-Fi icon on your phone while connected and look at the listed details to find the frequency.

Technical Requirements:

A device running **iOS 14.0+** or **Android 8.0+**
A **Wi-Fi internet connection**. Wi-Fi access point must be 802.11b, g or n compliant with WPA2 security and a DHCP-configured connection available for every connected LIFX light.


Get started

Download the LIFX app to begin.



Safety Instructions + Installation Guide

LIFX Ceiling

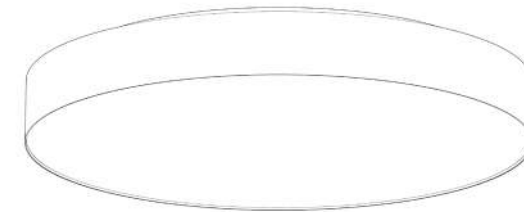

Flush mount
15" luminaire

Product Details

Chromaticity co-ordinates: colored light

$x < 0,270$ or $x > 0,530$
 $y < -2,3172 x^2 + 2,3653 x - 0,2199$
or $y > -2,3172 x^2 + 2,3653 x - 0,1595$

120V 60Hz

FEIT ELECTRIC CO. is the exclusive owner of rights and interests in and to the mark LIFX and the LIFX logo.

© 2024
All rights reserved.
Covered by patents.
lifx.com/patents

LIFX works diligently to ensure that LIFX products and their packaging materials comply with all relevant regulations in the regions we supply. See lifx.com/compliance for notices for your region.




Minimum starting temperature.



Reaches 100% brightness in 1 second or less.



High quality LEDs rated for 25,000 hours of use.



Connects to your routers 2.4GHz Wi-Fi band.



Not suitable for use under dust and moisture.



RoHS



Intertek



Prefer setup videos?
Text here too small or long?
Visit lifx.com/getstarted



Connects to your 2.4 GHz Wi-Fi network.

! SUPER QUICK SETUP

This is your matter code.
You'll need this after installing your light and turning it on.



Need extra help?

We've got tips & articles at support.lifx.com or you can chat with us live at LIFX.com

IMPORTANT!
Keep this code.


Installing your Ceiling Light.

⚠️ Cautions:

- Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.
- Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
- Double-check all connections to be sure they are tight and correct.
- Wear rubber soled shoes and work on a sturdy wooden ladder.
- Consult a qualified electrician to ensure a correct branch circuit conductor.
- This product is designed for use in a circuit protected by a fuse or circuit breaker.

WARNING: RISK OF FIRE. Use only on 120 volt 60Hz circuits. Suitable for damp locations. Before installing your lighting fixture, thoroughly review this installation manual.

WARNING: RISK OF SHOCK. House electric current can cause painful shock or serious injury unless handled properly.



If you do not have sufficient electrical wiring experience, please refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician. All electrical connections must be in accordance with Local and National Electrical Code (NEC) Standards. Reliable operating temperature is 0 °F -120 °F.

WARNING: RISK OF CUTS. Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.

Ensure you account for small parts and destroy packing material, as these may be hazardous to children.

If you are unsure about your wiring or any other installation requirements, consult a qualified electrician or local electrical inspector, and check your local electrical code.


Let's begin.

To install you'll need:



1 TURN OFF POWER


Ensure the power is off at the switch *and* the fusebox or circuit breaker.



2 PREPARE TO MOUNT TO CEILING

Remove the mounting plate.


Carefully unpack your new LIFX Ceiling fixture (A) and remove the mounting plate (B) from the back of the fixture by turning it (B) counter clock-wise.

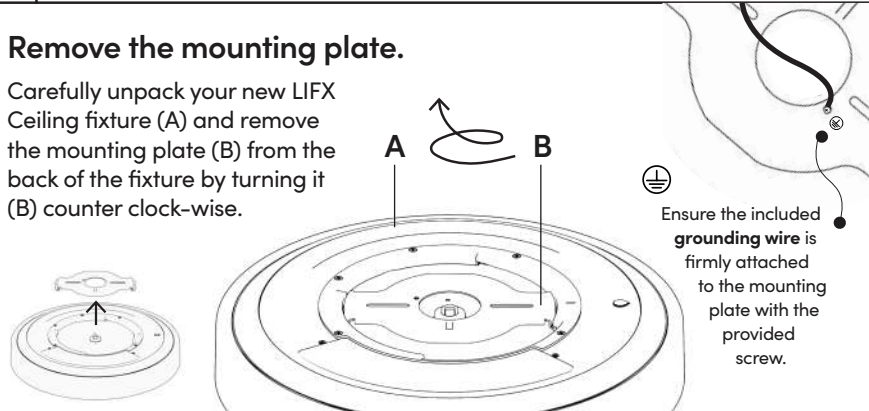

Ensure the included **grounding wire** is firmly attached to the mounting plate with the provided screw.


3 ATTACH MOUNT & INSTALL

Attach mounting plate.



Secure mounting plate (B) to the junction box (C) by inserting the two mounting screws through the slots of the mounting plate (B) and aligning to the junction box.

Connect wiring.

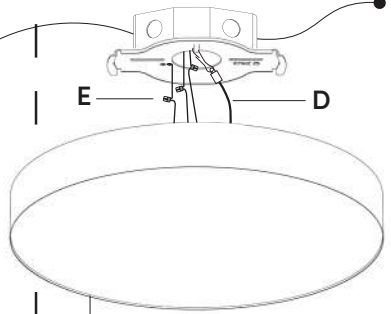


Lift the fixture (A) to the junction box. Secure safety cable (D) to the mounted plate on junction box.

Use the pre-attached connectors (E) on the fixture to connect the **white fixture wire to neutral supply wire**, and the **black fixture wire to the hot supply wire**.

The neutral and hot wires should be pushed firmly into the holes of the connector

Attach the Fixture.

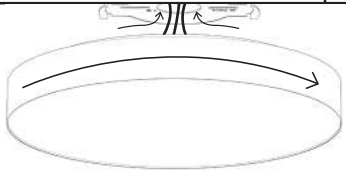

Tuck the electrical wires and safety cable into the junction box and then lift the fixture up to the mounting plate. Turn the fixture clock-wise to lock the fixture to the mounting plate.

Adding your light to your app.

SUPER QUICK SETUP

- 1 Download the LIFX App and sign in.
- 2 Make sure your light is on.
- 3 Hit the + button in the bottom right.

We'll guide you through from there.

You'll use the code on the front of this manual for quick setup in the LIFX app too.

USING MATTER?

Just scan the code on the front of this manual and pick the smart home platform you want to add your light to.

To use Matter home and away, you'll need a Google, Apple or other smart home hub that's Matter-enabled. Devices with older hardware may not be compatible.



Use the '+' to add new products, schedule lighting changes or to snapshot your current lighting and save as a Scene so you can trigger it again easily later.